




HIWEIGH TECHNOLOGIES LIMITED

MODEL: L1P3

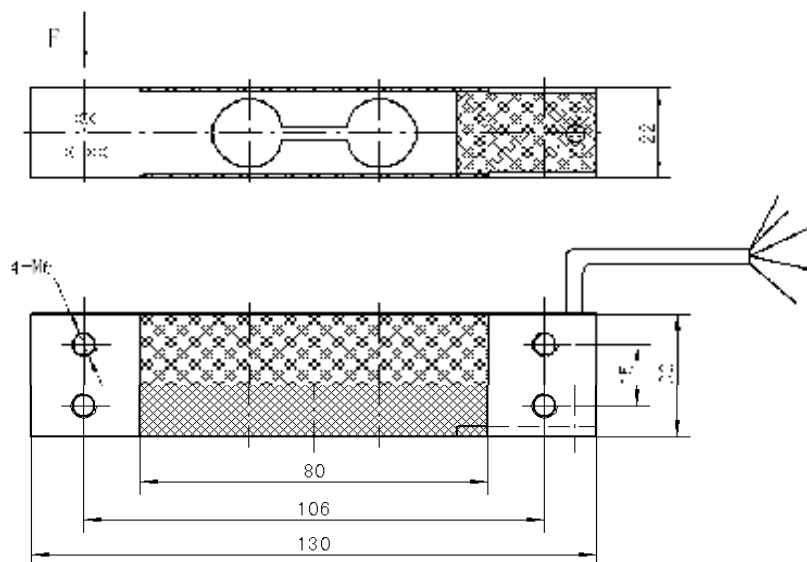

Model	1P-350-G	1P-350-G3	1P-350-G6
Resolution	15000	30000	60000
Capacity	3Kg 、 5Kg、 8 Kg、 10Kg、 20Kg、 35 Kg、 40Kg、 50 Kg		
Tolerance	0.02		
Output sensitivity	2.0 \pm 0.2mV/V		
Non-linearity	\pm 0.02%F.S.		
Repeat	\pm 0.01%F.S.		
Creep	\pm 0.015%F.S.10min		
Temperature effect on zero	\pm 0.1%F.S./10°C		
Temperature effect on sensitivity	\pm 0.02%F.S./10°C		
Zero Output	\pm 2%F.S.		
Input resistant	395 \pm 10 Ω		
Output resistant	350 \pm 5 Ω		
Insulation resistant	\geq 5000 M Ω (50V)		
Recommended excitation voltage	5~12V		
Working temp	-10~+40°C		
Overloading	150%F.S.		
Cable: Φ 3.9 shield, L=500mm (out load cell body 450mm) Red: INPUT+; Black: INPUT- ; Green: OUTPUT+; White: OUTPUT-			