




SPECIFICATIONS

Power	100-240V AC 12V DC adaptor Rechargeable battery
Material	Steel tube structure Stainless steel cover and pole
Display	38mm 1.5" LED
Capacity	15/30/60/150/300/600 kg
Division	2/5/10/20/50/100 g
Units	kg/lb
Output	RS232*1
Load Cell	M15/M17/M19
Load Cell Protection	IP65
Indicator Protection	IP54
Platform Size	300x400mm 400x500mm 500x600mm 600x800mm
Operating Temperature	-10 °C - 40 °C

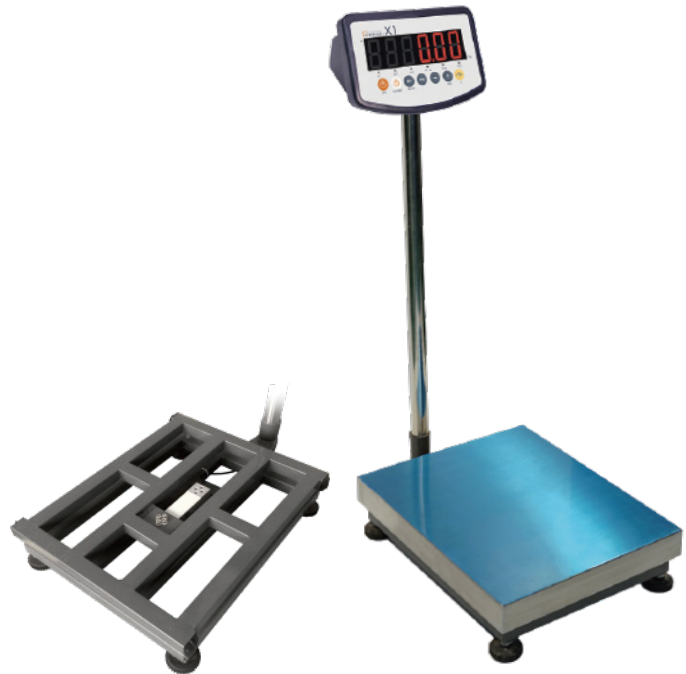

FUNCTIONS

Counting
(Peak) Hold
Totalization
Animal weighing

FEATURES

- X1 indicator with multi units and multi functions
- Large 38mm red LED display
- Default with RS232 interface
- Capacity up to 600kg
- High quality IP65 aluminum alloy load cell
- Four anti-slip adjusting feet
- Overload protection

OPTIONAL

Accessories	Part No.
S.S. bracket	109001
Relay 2 output	109002
Relay 4 output	109003
Bluetooth	109004
Bluetooth-(With app)	109005
Ethernet/WiFi	109006
WiFi	109007
RS485	109008
4-20mA	109009



MODELS

Model	Part No.	Size	Capacity	Division	L.C.IP
AKX3015	620182	300x400mm	15kg	2g	IP65
AKX3030	620183	300x400mm	30kg	5g	
AKX3060	620184	300x400mm	60kg	10g	
AKX4030	620185	400x500mm	30kg	5g	
AKX4060	620186	400x500mm	60kg	10g	
AKX4150	620187	400x500mm	150kg	20g	
AKX5060	620188	500x600mm	60kg	10g	
AKX5150	620189	500x600mm	150kg	20g	
AKX5300	620190	500x600mm	300kg	50g	
AKX6150	620191	600x800mm	150kg	20g	
AKX6300	620192	600x800mm	300kg	50g	
AKX6600	620193	600x800mm	600kg	100g	

DIMENSION / mm

Model	a	b	h	h1	pack size	G.W/kg	1PC/CTN
AKX3*	300	400	125	515	795*415*160	13.5	1
AKX4*	400	500	125	615	895*515*160	17.5	1
AKX5*	500	600	130	620	995*615*175	30.5	1
AKX6*	600	800	150	690	1195*715*205	38.5	1

