

dimension: mm

Models	a	b	h	h1
BBK3	400	300	110	480
BBK4	500	400	120	490

**Power**

 100-240V AC  
 Battery: 6V2.8Ah  
 Estimated Battery Life: 30 hours  
 Charge Time: 8 Hours

**Display Resolution**

1/3,000 - 1/15,000

**Platform Sizes**

300 x 400mm | 400 x 500mm

**Capacity**

15 - 150kg

**Load Cells**

B6N - IP67

**Display**

FSTN LCD - 37mm

**Units**

Kg/lb | g/oz

**Output**

 RS232 \* 2  
 optional Bluetooth  
 optional WiFi

**Operating Temperature**

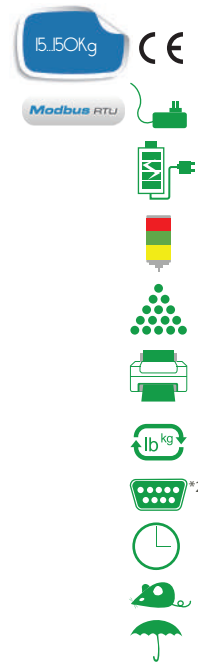
-10°C - 40°C

**Approval**

CE

**Models**

Part No.	100152	100153	100154	100155	100156	100157
Models	BBK3015	BBK3030	BBK3060	BBK4030	BBK4060	BBK4150
<b>U.P.(USD)</b>	<b>\$880.00</b>	<b>\$880.00</b>	<b>\$880.00</b>	<b>\$1,000.00</b>	<b>\$1,000.00</b>	<b>\$1,000.00</b>
Capacity	15kg	30kg	60kg	30kg	60kg	150kg
Division	1/2g	2/5g	5/10g	2/5g	5/10g	10/20g
Size	300 x 400mm			400 x 500mm		
Weight	12kg			15kg		


**SUS304 Platform**

 Compact SUS304 s.s structure  
 SUS304 stainless steel cover  
 Capacity up to 150Kg  
 With overloading protection  
 With s.s rectangular pole

**B6N Load Cell**

 17-4Ph stainless steel  
 IP67 protection

**K7i Indicator**

 Big backlit FSTN LCD display  
*- the weight can be read clearly even in the sun.*  
 With rechargeable 6V2.8Ah battery  
 100-240v power source directly  
 kg/lb, g/oz units exchange  
 Real-time clock, date display  
 Checkweigh with three LED lights  
 Animal weighing function,  
 accumulating, hold, x10 accuracy,  
 counting, zero, tare, printing, etc.  
 Default with 2 RS232 interface  
 Option of Bluetooth output  
 Option of WiFi output  
 Option of Relay output
