

SUS304 Platform


Compact SUS304 s.s structure
SUS304 stainless steel cover
Capacity up to 30Kg
With overloading protection
With stainless steel pole

M13 Load Cell

IP65 aluminum M13 load cell
Up to IP66 protection with shield

K7i Indicator

Big backlit FSTN LCD display
- the weight can be read clearly even in the sun.
With rechargeable 6V2.8Ah battery
100-240v power source directly
kg/lb, g/oz units exchange
Real-time clock, date display
Checkweigh with three LED lights
Animal weighing function, accumulating, hold, x10 accuracy, counting, zero, tare, printing, etc.
Default with 2 RS232 interface
Option of Bluetooth output
Option of WiFi output
Option of Relay output
Optional washdown printer

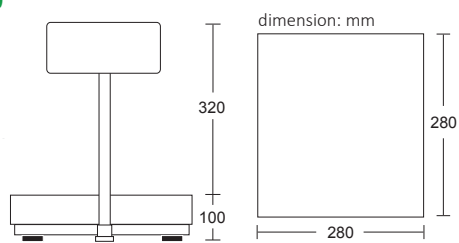

- Power**
100-240V AC
Battery: 6V2.8Ah
Estimated Battery Life: 30 hours
Charge Time: 8 Hours
- Display**
FSTN LCD - 37mm
- Units**
Kg/lb | g/oz
- Output**
RS232 * 2
optional Bluetooth
optional WiFi
- Operating Temperature**
-10°C - 40°C
- Approval**
CE
- Display Resolution**
1/3,000 - 1/15,000
- Platform Sizes**
280 x 280mm
- Capacity**
3 - 30kg
- Load Cell**
M13 - IP65



Models

| | | | | |
|------------------|-----------------|-----------------|-----------------|-----------------|
| Part No. | 100167 | 100168 | 100169 | 100170 |
| Models | BBQ2803 | BBQ2806 | BBQ2815 | BBQ2830 |
| U.P.(USD) | \$540.00 | \$540.00 | \$540.00 | \$540.00 |
| Capacity | 3kg | 6kg | 15kg | 30kg |
| Division | 0.5/0.2g | 0.5/1.0g | 1.0/2.0g | 2.0/3.0g |
| Size | 300 x 400mm | | | |
| Weight | 10.5kg | | | |