

option

 option

 option

SUS304 S.S Platform

- SUS304 stainless steel structure
- SUS304 stainless steel cover
- Stainless steel base and pole
- Top or side mounted rubber pads
- Overloading protecting
- Optional PFS protecting rail




M15/M17 Load Cells

- With IP66 protecting shield
- Plastic or stainless steel cover



K7i Indicator

- Big backlit FSTN LCD display - *the weight can be read clearly even in the sun.*
- With rechargeable 6V2.8Ah battery
- 100-240v power source directly
- kg/lb, g/oz units exchange
- Real-time clock, date display
- Checkweigh with three LED lights
- Animal weighing function, accumulating, hold x10 accuracy, counting, zero, tare, printing, etc.
- Default with 2 RS232 interface
- Option of Bluetooth output
- Option of WiFi output
- Option of Relay output

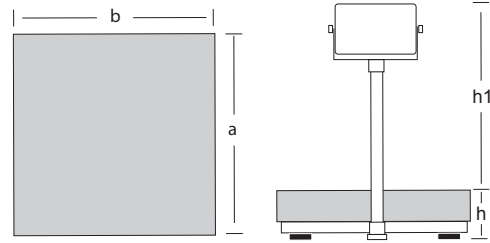

Models	a	b	h	h1
BBX3	400	300	125	520
BBX4	500	400	125	620
BBX5	600	500	130	625
BBX6	800	600	150	695

Power
 110V or 220V AC
 Battery: 6V2.8Ah
 Estimated Battery Life: 30 hours
 Charge Time: 8 Hours

Display
 FSTN LCD - 37mm

Units
 Kg/lb
 g/oz

Display Resolution
 1/3,000 - 1/15,000

Output
 RS232 * 2
 optional Bluetooth
 optional WiFi

Platform Sizes
 300 x 400mm | 400 x 500mm
 500 x 600mm | 600 x 800mm

Capacity
 30 - 500kg

Operating Temperature
 -10°C - 40°C

Load Cells
 M15 | M17 - IP66 with shield

Approval
 CE

Models * optional 1/15,000 divisions

Part No.	100143	100144	100145	100146	100147	100148	100149	100150	100151
Models	BBX3030	BBX3060	BBX3150	BBX4060	BBX4150	BBX5150	BBX5300	BBX6300	BBX6500
U.P.(USD)	\$672.00	\$672.00	\$672.00	\$720.00	\$720.00	\$940.00	\$940.00	\$1,300.00	\$1,300.00
Capacity	30kg	60kg	150kg	60kg	150kg	150kg	300kg	300kg	500kg
Division	5g	10g	20g	10g	20g	20g	50g	50g	50g
Size	300 x 400mm			400 x 500mm		500 x 600mm		600 x 800mm	
Weight	14kg			18kg		31kg		39kg	

Value Each Gram A professional weighing products manufacturer and supplier

Tel: +86-21-58273591

Fax: +86-21-58273591

www.hiweigh.com

info@hiweigh.com