

SPECIFICATIONS

Power	100-240V AC 12V DC adaptor Rechargeable battery
Material	Aluminum alloy structure SUS304 S.S. cover and pole
Display	38mm 1.5" LED
Capacity	30/60/150/300/500 kg
Division	5/10/20/50/100 g
Units	kg/lb
Output	RS232*1
Load Cell	M15/M15M//M17/M17M
Load Cell Approval	OIML/NTEP
Load Cell Protection	IP65
Indicator Protection	IP54
Platform Size	300x400mm 400x500mm 450x600mm
Operating Temperature	-10 °C - 40 °C



FUNCTIONS


Counting
(Peak) Hold
Totalization
Animal weighing

FEATURES

- X1 indicator with multi units and multi functions
- Large 38mm red LED display
- Default with RS232 interface
- Capacity up to 500kg
- OIML/NTEP approved load cells
- Four anti-slip adjusting feet
- Overload protection

OPTIONAL

Accessories	Part No.
S.S. bracket	109001
Relay 2 output	109002
Relay 4 output	109003
Bluetooth	109004
Bluetooth-(With app)	109005
Ethernet/WiFi	109006
WiFi	109007
RS485	109008
4-20mA	109009

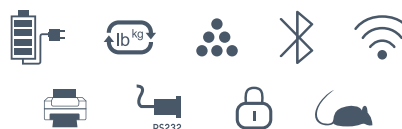

MODELS

Model	Part No.	Size	Capacity	Division	L.C.IP
BSA3030	620203	300x400mm	30kg	5g	IP65
BSA3060	620204	300x400mm	60kg	10g	
BSA3150	620205	300x400mm	150kg	20g	
BSA4060	620206	400x500mm	60kg	10g	
BSA4150	620207	400x500mm	150kg	20g	
BSA4300	620208	400x500mm	300kg	50g	
BSA5150	620209	450x600mm	150kg	20g	
BSA5300	620210	450x600mm	300kg	50g	
BSA5500	620211	450x600mm	500kg	100g	

DIMENSION / mm

Model	a	b	h	h1	pack size	G.W/kg	1PC/CTN
BSA3*	300	400	110	550	450*370*180	9	1
BSA4*	400	500	130	615	560*470*215	14.5	1
BSA5*	450	600	130	615	650*520*215	18.5	1

