



SPECIFICATIONS

Material	100-240V AC 6V2.8Ah Rechargeable Battery
Material	SUS304 S.S.
Display	Backlit FSTN LCD
Capacity	6/15/30/60/150 kg
Division	1/2/5/10/20 g
Units	kg lb g oz
Output	2*RS232
Load Cell	M13/M15
Load Cell Protection	IP66
Indicator Protection	IP65
Platform Size	315x315mm
Operating Temperature	-10 °C - 40 °C



FUNCTIONS


Zero/Tare
Hold
Counting
Checkweigh
Accumulation
Animal weighing
x10 accuracy

FEATURES

- K7S indicator with multi units and multi functions
- 37mm backlit FSTN LCD display
- Default with double RS232 interface
- Accumulate up to 2000 records
- Capacity up to 150kg
- OIML/NTEP approved load cells
- Four anti-slip adjusting feet
- Overload protection

OPTIONAL

Accessories	Part No.
Relay 4 output	109003
Bluetooth	109004
Bluetooth-(With app)	109005
Ethernet/WiFi	109006
WiFi	109007
4-20mA	109009

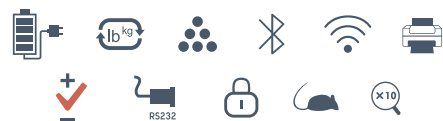

MODELS

Model	Part No.	Size	Capacity	Division	L.C.IP
FOD3006	620248	315x315mm	6kg	1g	IP66
FOD3015	620249		15kg	2g	
FOD3030	620250		30kg	5g	
FOD3060	620251		60kg	10g	
FOD3150	620252		150kg	20g	

DIMENSION / mm

Model	a	b	h	h1	pack size	G.W/kg	1PC/CTN
FOD	315	315	150	400	475*415*160	10	1

