




Features

- > Aluminum load cell supporter
- > Rugged ABS housing
- > Big s.s pan 315 x 250mm
- > Bright red LED display
- > Rechargeable 6V4A battery
 - 150hrs operating time
- > Dual range capacity
- > Rear display - PC5E*
- > Pole display - PC5E*H
- > 6 direct PLU keys
- > Kg | lb unit for selection
- > Brightness of LED adjustable
- > Zero and full capacity tare
- > Accumulating function
- > Auto power off
- > Optional RS232 interface
- > Optional Bluetooth output



TechnicalData

Power
100-240V - 9V800mA adaptor
Rechargeable Battery: 6V4Ah
Estimated working time: 150hrs

Pan Dimensions
315 x 250mm

Capacity
3 | 6 | 15 | 30Kg

Display Resolution
1/15,000

Net Weight
3.8Kg | 4.4kg (PC5EH)

Display
red LED

Units
Kg | lb

Sampling Speed
40 times/second

Non-linearity
≤0.01%F.S.

Power Consumption
30mA

PLU
6



Operating Temperature
-10°C - 40°C
≤80% non-condensing

Storage Temperature
-25°C - 55°C
≤80% non-condensing

Approval
CE

RS232
Optional

dimension in mm

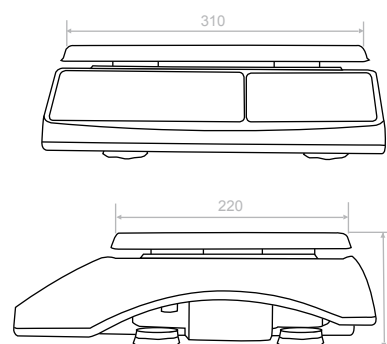

Models

Part No.	100898	100899	100900	100901
Models	PC5E15	PC5E30	PC5E15H	PC5E30H
U.P.(USD)	\$140.00	\$140.00	\$168.00	\$168.00
Capacity	6/15kg	15/30kg	6/15kg	15/30kg
Division	2/5g	5/10g	2/5g	5/10g
Pole	No		Yes	
Pack Size	75 x 45 x 34cm (4pcs)		75 x 45 x 34cm (4pcs)	
Weight	17kg (4pcs)		19.4kg (4pcs)	