

SUS304 Structure

- 1150mm or 1220mm length for selection
- 540mm or 680mm width for selection
- Complete SUS304 stainless steel
- Nylon castors and wheels
- Big capacity up to 2000kg
- optional 3000kg capacity

M28s LoadCell





- Stainless steel material, IP67 protection
- Optional OIML/NTEP approved B8D load cells

K7T Indicator

- Stainless steel housing
- Big backlit FSTN LCD display
- the weight can be read clearly even in the sun.
- With rechargeable 6V4Ah battery
- 100-240v power source directly
- kg/lb, g/oz units exchange
- Real-time clock, time/date display
- Checkweigh with three LED lights
- Animal weighing function, accumulating, hold
- x10 accuracy, counting, zero, tare, printing, etc.
- Default with 2 RS232 interface
- Option of Bluetooth or WiFi output
- Optional printer - 154001 PH-PRT
- Optional OIML/EC Type approved indicator

Dimension

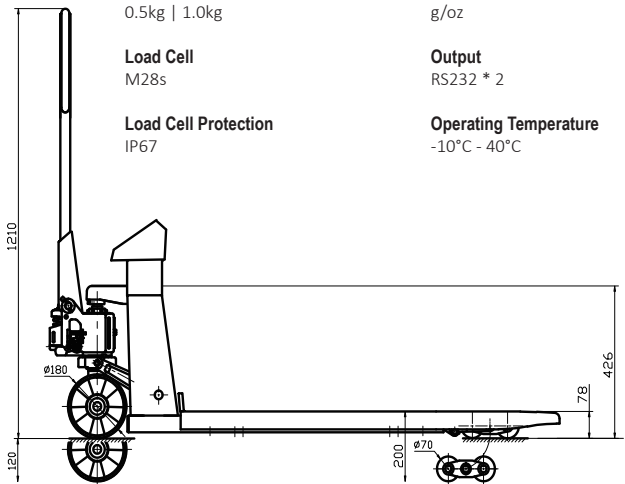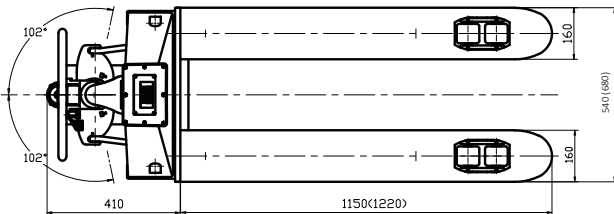

Platform Sizes

- 1150 x 540mm
- 1220 x 680mm

Capacity

- 2000kg
- 3000kg - optional

Display Resolution

- 0.5kg | 1.0kg

Load Cell

- M28s

Load Cell Protection

- IP67

Power

- 100-240V 50/60Hz
- Battery: 6V5Ah

Display

- FSTN LCD - 37mm

Units

- Kg/lb
- g/oz

Output

- RS232 * 2

Operating Temperature

- 10°C - 40°C

Models *2500kg | 3000kg capacity optional

Part No.	100710	100711	154001
Models	PHAS	PHAS680	PH-PRT
U.P.(USD)	\$7,600.00	\$7,800.00	\$340.00
Capacity	2000kg	2000kg	-
Division	0.5kg	0.5kg	-
Weight	120kg	120kg	-