



10.2" TFT TouchDisplay

Touch operation
User-friendly TFT display
Memory of 100 formulas
Formulas for 6/8/10/12 outlets
Simple operation and easy to maintain
USB interface for the weighing data output
Can be connected to labelling machine, barcode reader, metal detector or other peripheral equipments
3-class password protection, and multi statistics function

SUS304 StainlessSteel

Completely stainless steel structure
Hygienic, quick installation and easy clean
Suitable for fish, prawns, poultry, meat, etc.
High precision load cell made by HBM or equivalent
Brushless DC motor, European or Taiwan brand
High quality Habasit transport belt
6/8/10/12 gates for selection
optional SUS316 material

Capacity
300g - 3kg

Division
0.05g - 1g

Display
10.2" TFT

Protection
IP65

Belt Width
100mm - 300mm

Operating Temperature
0 - 40°C

Power
110V or 220V 50Hz

Load Cell
HBM* or equivalent

Motor
STS*


Belt
Habasit*

Inverter
Delta*

Relay
Omron*

**All those product names, logos, brands and other trademarks featured or referred to within this catalog are the property of their respective trademark holders.*



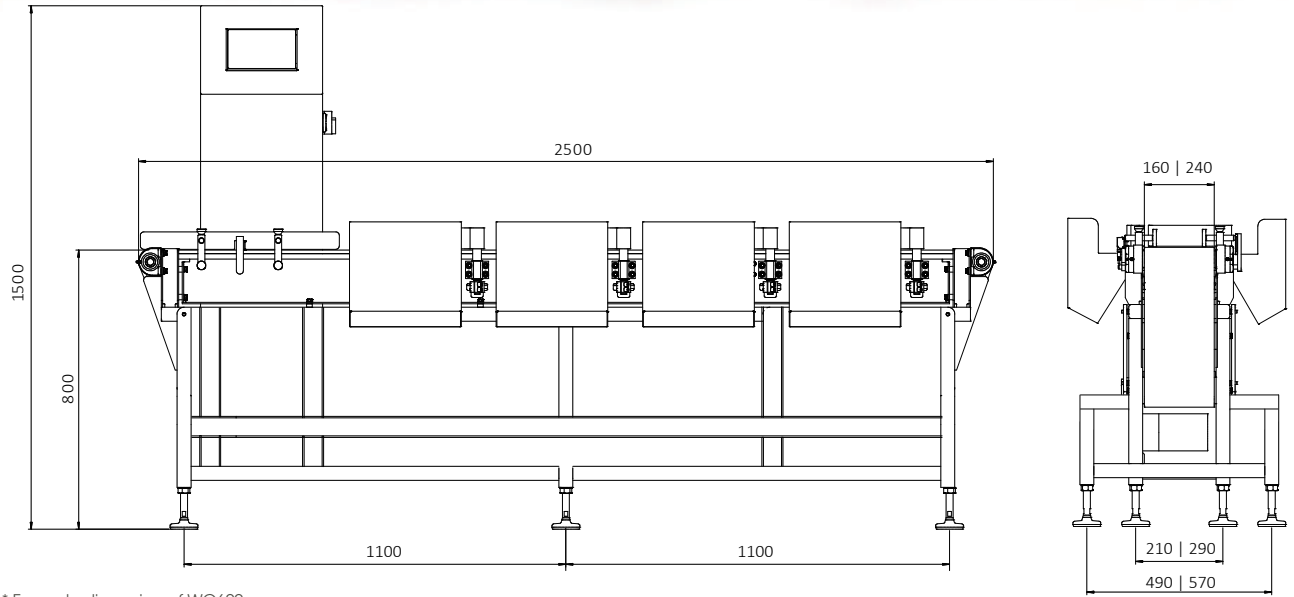

* Example dimension of WG600
* Dimension in mm

Models

- * e - Economical Models | * none - Standard Models
- * h - High class models | * i - Intelligent Models
- * Intelligent models with function of self-learning, interfaces to barcode reader, ink jet coding system, DCS, traceable system, labelling system, etc.
- * 6/8/10/12 outlets for option, please inform our sales technician or distributors upon order placed

Part No.	210033	210034	210035	210036	unit	210037	210038	210039	210040
Models	WG300e	WG300	WG300h	WG300i		WG600e	WG600	WG600h	WG600i
Capacity	300g					600g			
Check Range	10 - 300g					10 - 600g			
Division	0.2	0.1	0.05	0.05	g	0.2	0.1	0.05	0.05
Accuracy	±1	±0.3	±0.15	±0.15	g	±1	±0.3	±0.15	±0.15
Max.Speed	300	200	120	150	pcs/minute	220	150	120	140
Conveyor Speed	96	70	45	55	meter/minute	96	70	45	55
Package Length	50-200				mm	50-300			
Package Width	30-120				mm	30-180			
Package Height	2-100				mm	2-150			
Weigh Zone	Length - 180 320 Width - 100 160				mm	Length - 320 400 Width - 160 240			
Product Memory	100				groups	100			
Display	7" TFT		10.2" TFT			7" TFT		10.2" TFT	
Power	110V or 220V 50Hz					110V or 220V 50Hz			
Protection	IP65					IP65			

Part No.	210041	210042	210043	210044	unit	210045	210046	210047	210048
Models	WG1200e	WG1200	WG1200h	WG1200i		WG3000e	WG3000	WG3000h	WG3000i
Capacity	1200g					3000g			
Check Range	10 - 1200g					30 - 3000g			
Division	0.5	0.2	0.1	0.1	g	1	0.5	0.2	0.2
Accuracy	±1.5	±0.6	±0.3	±0.3	g	±3	±1.5	±0.6	±0.6
Max.Speed	300	200	120	150	pcs/minute	160	120	80	95
Conveyor Speed	96	70	45	55	meter/minute	96	70	45	55
Package Length	50-350				mm	50-380			
Package Width	30-220				mm	30-250			
Package Height	2-180				mm	2-200			
Weigh Zone	Length - 400 450 Width - 240 300				mm	Length - 500 Width - 300			
Product Memory	100				groups	100			
Display	7" TFT		10.2" TFT			7" TFT		10.2" TFT	
Power	110V or 220V 50Hz					110V or 220V 50Hz			
Protection	IP65					IP65			