

SPECIFICATIONS

Power	12V DC Adaptor 6V4Ah Rechargeable Battery
Display	Backlit LCD display
Capacity	3/6/15/30 kg
Division	0.1/0.2/0.5/1/2/5/10 g
Units	kg/g/lb, etc.
Accuracy	Class III
A/D Rate	15 times/second
Non-linearity	≤0.01%F.S.
Pan Size	310X220mm
Display Resolution	1/3,000(approved)--1/30,000
Operating Temperature	-10 °C - 40 °C



FUNCTIONS

- Weighing
- Counting
- Accumulate
- Checkweigh
- Hold (4 modes)
- Weighing speed adjustable
- Power saving
- Full capacity tare
- Gravity value setting
- Record recall and clean

FEATURES

- OIML and EU Type approval, legal for trade
- Bright backlit LCD display
- Double aluminum load cell supporter
- Bubble level and 4 adjustable feet
- Dust cover blister, easy to clean
- Single or dual range capacity setting

MODELS


Model	Part No.	Capacity	Division
WX3	640118	3kg	0.1g
WX6	640119	6kg	0.2g
WX15	640120	15kg	0.5g
WX30	640121	30kg	1g
WX3M	640122	3kg	1g
WX6M	640123	6kg	2g
WX15M	640124	15kg	5g
WX30M	640125	30kg	10g

PACK SIZE

820*400*310mm (4pcs)

WEIGHT

4kg(4pcs)

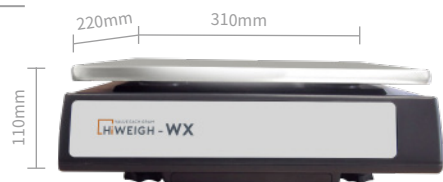

OPTIONAL

Accessories	Part No.
RS232	109009
Bluetooth	109017

