




Features

- Stainless steel housing <
- Big s.s pan 315 x 250mm <
- Big LCD display with backlit <
- Rechargeable 6V battery <
- 320hrs operating time (no backlit) <
- High accuracy of 1/30,000 <
- approved model till 1/3,000 only <
- Aluminum load cell supporter <
- Single or dual range setup <
- Seven operating keys <
- Checkweigh function <
- Counting function <
- Full capacity tare <
- Accumulation function <
- Accumulation recall <
- Gravity value set <
- Hold function <
- Auto power off <
- RS232 optional <
- Bluetooth optional <
- WiFi optional <

TechnicalData

Power 100-240V - 12V1A adaptor Rechargeable Battery: 6V4Ah Estimated working time: 320hrs - no backlit 120hrs - backlit Charge Time: 3hrs	Display LCD (30mm)	Operating Temperature -10°C - 40°C
Pan Dimensions 315 x 250mm	Units Kg lb g oz	Storage Temperature -25°C - 55°C
Capacity 3 6 15 30Kg	Sampling Speed 15 times/second (7.5 30 for selection)	Relative Humidity ≤80% non-condensing
Display Resolution 1/3,000 1/30,000	Non-linearity ≤0.01%F.S.	Approval CE EC Type (pending)
Net Weight 6Kg	Power Consumption 12mA - no backlit 36mA - with backlit 48mA - with backlit RS232	RS232 Optional

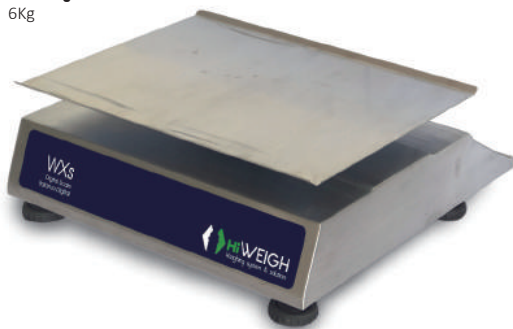

Models

Part No.	100842	100843	100844	100845	100846	100847	100848	100849
Models	WXS3	WXS6	WXS15	WXS30	WXS3M	WXS6M	WXS15M	WXS30M
U.P.(USD)	\$248.00	\$248.00	\$248.00	\$248.00	\$288.00	\$288.00	\$288.00	\$288.00
Capacity	3kg	6kg	15kg	30kg	3kg	6kg	15kg	30kg
Division	0.1g	0.2g	0.5g	1g	1g	2g	5g	10g
Pack Size	78 x 45 x 35cm (4pcs)							
Weight	26kg (4pcs)							