

FSTN LCD
 Clear Read in the sun

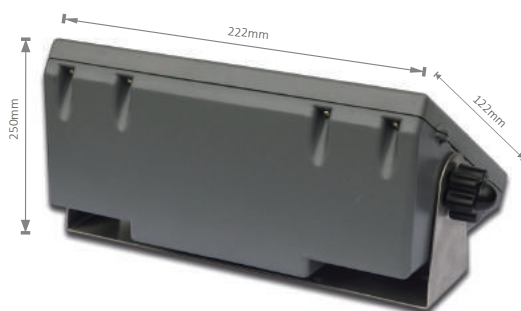

X3A | X3AGM



X3AR | X3ARM



X3AM



Specifications

- ABS housing <
- LED or LCD display <
- For 1x4x350Ω up to 8x 700Ω load cells <
- Programming zero tracking <
- Programming digital filter <
- Selectable Kg/Lb units <
- RS232 interface <
- Counting function <
- Animal weighing <
- Hold function <
- Power saving mode <
- Accumulation function <
- Optional relay output - Relay-2/4 <
- Optional real-clock (for LCD) - X1001 <
- Optional bluetooth output - X1002 <
- Optional WiFi output - X1003 <
- Optional RS485 - X1004 <
- Optional 4-20mA - X1005 <

TechnicalData

Power

100-240V 50/60Hz - 12V adaptor
 Rechargeable Battery: 6V2.8Ah
 Estimated Battery Life: 30 hours
 Charge Time: 8 Hours

Excitation Voltage

DC5V
 1-4 * 350Ω | 1-8*700Ω load cells

Analog Input Signal

-1 - 10mV

A/D Resolution

100,000

A/D Rate

40 times/second

Display

X3A | X3AGM: green LED (0.8")
 X3AR | X3ARM: red LED (0.8")
 X3AC: FSTN LCD (1")
 X3AM: blue LCD (1")

Display Resolution

1/3,000 - 1/30,000

Units

Kg/Lb

Output

RS232

Operating Temperature

-10°C - 40°C

Approval

X3A | X3AR | X3AC: CE
 X3ARM | X3AGM:
 OIML/EC Type | T8640 (NMI)
 X3AM: OIML/EC Type | T8127 (NMI)

Storage Temperature

-25°C - 55°C

Relative Humidity

≤80% non-condensing

Packing Size

60*60*42cm (12pcs)

Packing Weight

24Kg (12pcs)

Models

Part No.	110025	110026	110027	110028	110029	110030		
Models	X3A	X3AGM	X3AR	X3ARM	X3AC	X3AM		
U.P.(USD)	\$144.00	\$160.00	\$112.00	\$136.00	\$128.00	\$192.00		
Display	green LED 0.8"		red LED 0.8"		LCD 1"	LCD 1"		
Approval	CE	CE OIML	CE	CE OIML	CE	CE OIML		
Weight	1.8kg	1.8kg	1.8kg	1.8kg	1.8kg	1.8kg		
Part No.	157001		157002	157003	157004	157005	157006	157009
Models	Relay-2		Relay-4	X1001	X1002	X1003	X1004	X1005
U.P.(USD)	\$48.00		\$80.00	\$20.00	\$40.00	\$152.00	\$20.00	\$152.00