
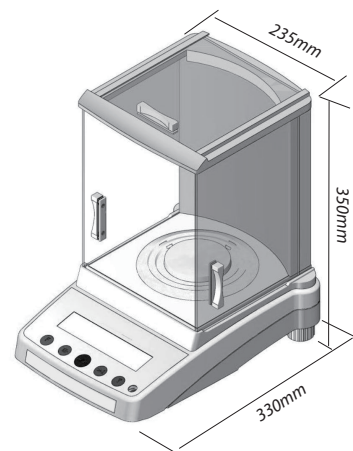


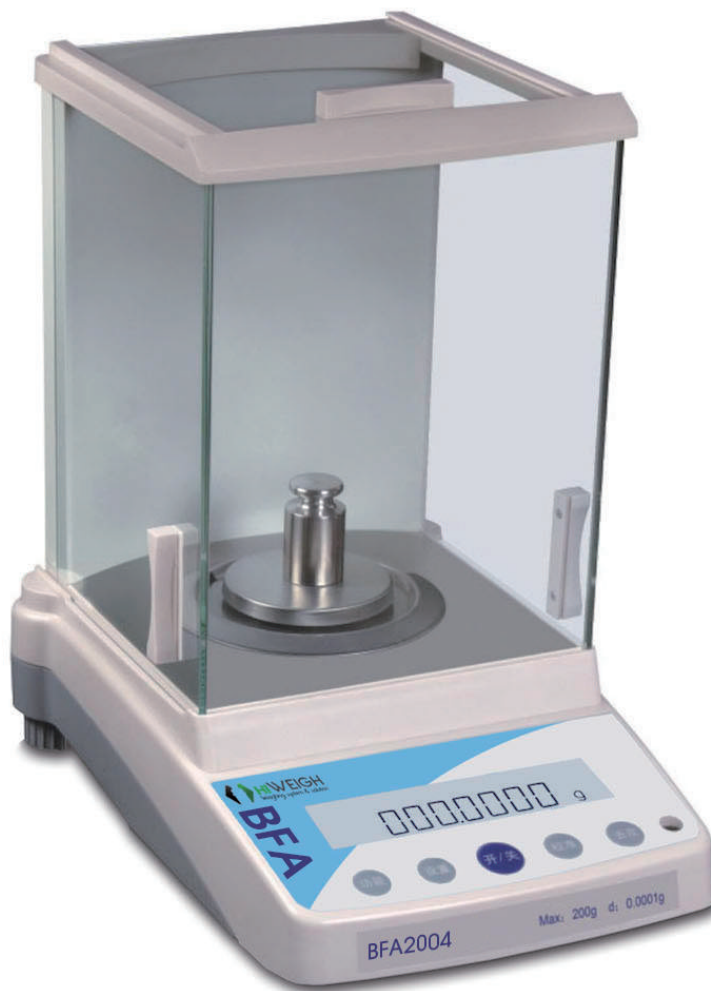

Features

- > Classic design
- > Two adjusting feet
- > Aluminum rear base
- > High transparency windshield
- > Stainless steel pan: 80mm/110mm
- > EMF sensor with high accuracy:
 - > 0.1mg - till 220g capacity
 - > 1mg - till 500g capacity
- > LCD display with backlight
- > Multi-units exchange:
 - > gram/carat/ounce
- > Tare function
- > Counting function
- > Response speed adjust
- > Below weighing
- > RS232 interface

Accessories

- > Statistics printer - XT110
- > Label printer - T40
- > Balance Table I - 900 x 600mm
- > Balance Table II - 1200 x 600mm

TechnicalData

Power
100-240V 50/60Hz

Capacity
60g-500g

Accuracy
0.1mg/1mg

Repeatability
+/- 1d

Linearity
+/- 2d

S.S Pan
0.1mg - 80mm
1mg - 110mm

Units
g/ct/oz

Serial Output
RS232

Operating Temperature
0.1mg 20°C ± 2.5°C
1mg 20°C ± 7.5°C

Relative Humidity
0.1mg 50% - 75%
1mg 40% - 80%

Approval
CE

External Dimensions
330 x 235 x 350mm

Net Weight
6Kg

Models

Part No.	101111	101112	101113	101114	101115
Models	BFA1104	BFA2104	BFA2003	BFA3003	BFA5003
U.P.(USD)	Updating on 2018				
Capacity	110g	210g	200g	300g	500g
Division	0.1mg	0.1mg	0.1mg	0.1mg	0.1mg
S.S Pan	Dia 80mm		Dia 110mm		
Weight	6kg				