



MDS



MDSS



MDSS1.2



MRD




Wireless

## Specifications

- High luminance and good stability <
- Indoor or outdoor use <
- 1.2"/3"/5"/8" red LED display choice <
- Optional wireless connection <
- Optional shield for sunlight <
- Suitable for many models: <
- X1/2/3/5/6/7/8 serials of HIWEIGH \*
- K7/K8/K9/K3000/Y serials of Moorange \*
- T800/8142/IND2\*/Kingbird/3129 of Mettler Toledo\*
- VT300D/VT300 of Vishay\*
- X5 of Sartorius\*
- 120+/920I of RiceLake\*
- EDI-800/EDI-302/312-RS of Yamato\*
- FT11 of Flintec\*
- 5200 of CAS\*
- T32XW, T71XW of Ohaus\*

...  
 \*All those product names, logos, brands and other trademarks featured or referred to within this catalog are the property of their respective trademark holders.

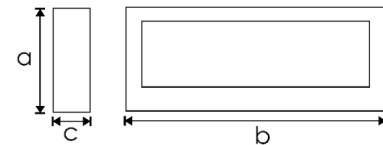

Model	LED	a	b	c	Weight
MDS3   MRD3	82	180	430	50	2.6
MDSS   MRD5	130	270	670	58	5.1
MDS8   MRD8	200	320	900	78	9
MDSS1.2	30	120	270	30	0.9
MDSS3	130	180	430	50	2.5
MDSS5	130	270	670	58	5

### Power

110V or 220V 50/60Hz

### Display

MDS(S) - red LED

MRD - green LED

### Housing

MDS | MRD - Coated steel

MDSS - Stainless Steel

### Interface

RS232

### Protocols

HIWEIGH

MOORANGE\*

METTLER TOLEDO\*

VISHAY\*

SATORIUS\*

RICELAKE\*

CAS\*

YAMATO\*

OHAUS\*

...

Customized protocol available.

## Models

Part No.	140001	140002	140003	140004	140005	140006	140007	140008	140009
Models	MDSS3	MDSS5	MDSS8	MRD3	MRD5	MRD8	MDSS1.2	MDSS3	MDSS5
U.P.(USD)	\$152.00	\$272.00	\$680.00	\$168.00	\$296.00	\$704.00	\$128.00	\$344.00	\$552.00
LED	3"	5"	8"	3"	5"	8"	1.2"	3"	5"
Display	red LED			green LED			red LED		
Housing	Steel						Stainless Steel		
IP Class	IP54						IP65		