


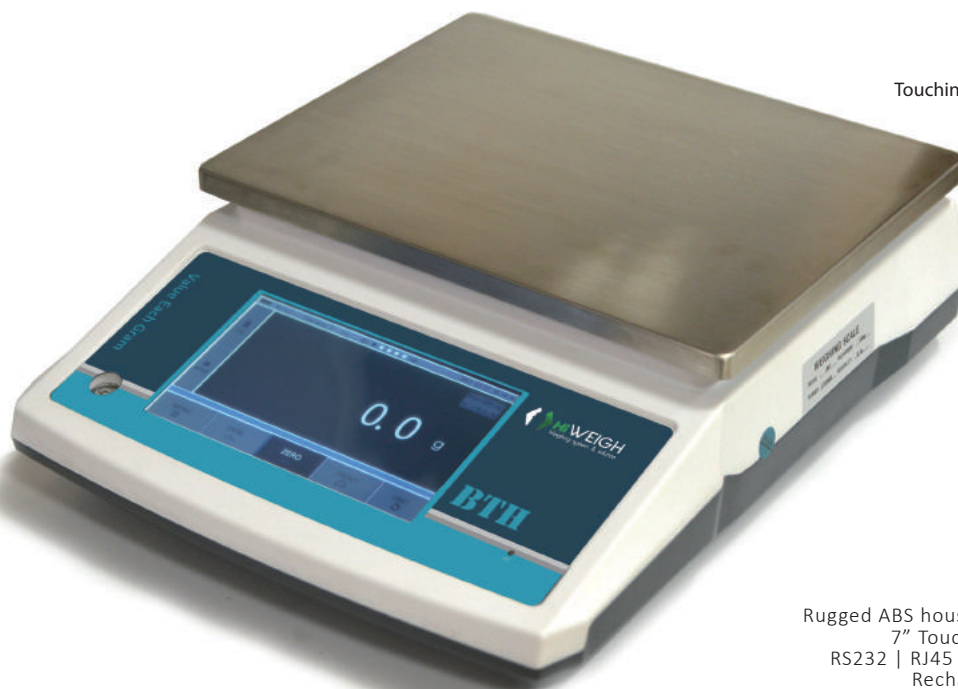

Features

Rugged ABS housing with s.s pan
 7" Touch screen display
 RS232 | RJ45 | USB interfaces
 Rechargeable battery
 100-240V AC/DC adaptor
 Big capacity up to 30kg
 High accuracy of 1/200,000
 mg, g, oz, ct units exchange
 Weight accumulation
 Weighing records function
 Checkweigh function
 Percentage weighing
 Density weighing
 Counting function
 Below weighing
 Grip position on the bottom
 Optional internal calibration

TechnicalData

Power 100 - 240V - 9V3A Adaptor Rechargeable Battery: 6V4Ah	Display 7" TFT	Operating Temperature -10°C - 40°C
Pan Dimensions 305 x 230mm	Units g mg oz ct	Approval CE
Capacity 10 20 30Kg	Interfaces RS232 RJ45 USB	
Division 0.1 g 0.2g	Repeatability ±3d	
Net Weight 6.0Kg	Linearity ±3d	



Models

Part No.	101165	101166	101167
Models	BTH10	BTH20	BTH30
U.P.(USD)	\$840.00	\$880.00	\$920.00
Capacity	10kg	20kg	30kg
Division	0.1g	0.1g	0.2g
S.S Pan		305 x 230mm	
Weight		6.0kg	