

2021
X12

Multi-functional
Weight Indicator





ABS

X12




2*RS232

Default with 2*RS232 interface, which makes it work with printer, remote display or other devices simultaneously.

The X12 and X12S indicators are widely used in most weighing needs, it with multi functions like accumulation, counting, animal weighing, checkweigh, etc.

X12 enclosure made of ABS material, which can mount to the pole of platform scale or indicator stand, also it can stand on the table or mount to the wall (with optional s.s bracket).

Double RS232 with multi protocols of continuous output or stable output, also print and command format.

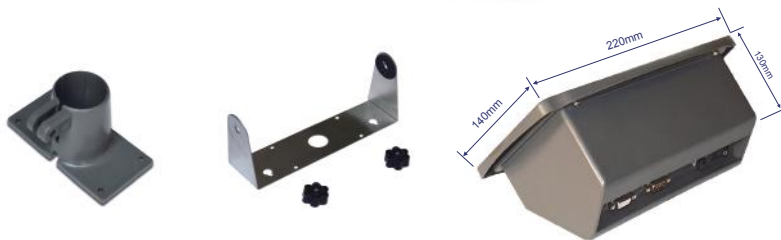

Checkweigh

Hi/Lo/Ok configuration for checkweigh



Counting

Piece counting function, easy to do sampling



Animalweigh

Dynamic weighing for livestock scales
Selectable auto or manual add/print



Multi-Units

kg | lb

FEATURES:

- Solid ABS housing
- Bright red LED display
- For 1-4*350Ω load cells
- Programming zero tracking
- Programming digital filter
- Selectable kg/lb units
- 2*RS232 interface
- Counting function
- Animal weighing
- Accumulation function
- Optional Ethernet/WiFi output - RWiFi
- Optional s.s bracket - X1006
- Optional barcode label printer - P201 | P401

MODEL:

Art.No.	Model	Approval	Enclosure	Weight
110090	X12	CE	ABS	1.9kg



CE

HiWEIGH
Value Each Gram

SUS304
X12S

2*RS232

Default with RS232 interface, which makes it work with printer, remote display or other devices.

COM



The X12 and X12S indicators are widely used in most weighing needs, it with multi functions like accumulation, counting, animal weighing, checkweigh, etc.

X12S enclosure made of SUS304 s.s., which with stainless steel bracket for stand on the table or mount to the wall, also the plastic pole holder is included in the shipping box.

Double RS232 with multi protocols of continuous output or stable output, also print and command format.

FEATURES:

- Stainless steel housing
- Solid ABS housing
- Bright red LED display
- For 1-4*350Ω load cells
- Programming zero tracking
- Programming digital filter
- Selectable kg/lb units
- 2*RS232 interface
- Counting function
- Animal weighing
- Accumulation function
- Optional Ethernet/WiFi output - RWiFi
- Optional barcode label printer - P201 | P401



Checkweigh

Hi/Lo/Ok configuration for checkweigh



Counting

Piece counting function, easy to do sampling



Animalweigh

Dynamic weighing for livestock scales
Selectable auto or manual add/print



Multi-Units

kg | lb



www.hiweigh.com | info@hiweigh.com

MODEL:

Art.No.	Model	Approval	Enclosure	Weight
110091	X12S	CE	SUS304	2.1kg



Ethernet/WiFi

Order Code: #140059 - RWiFi
 Order Code: #140060 - RNet
 RS232-Ethernet module or WiFi module
 Easy to configure and use with TCP/UDP
 Virtual COM port configure.

X12 Indicator Peripherals

iOT

iOT

Connecting the indicator to the printers, remote display, PC, etc., also to the ERP software and other programs.

With multi communication protocols, continuous output or stable output, also with different printing formats, customized protocols available.



RS232 Cable

Order Code: #140050 - 232C-C
 DB9 female connector to DB9 female connector.
 Cable length of 1.5m, white color available.



RS232-USB Cable

Order Code: #140098 232USB-F
 DB9 female connector to USB-A connector.
 Cable length of 1.5m, other color available.



Auto Data Cable

Order Code: #140099 Dcable-F
 DB9 female connector to USB-A connector.
 USB-HID protocol, transfer data automatically.
 Cable length of 1.5m.



DB9-DB25 Cable

Order Code: #140053 232DB
 DB9 male connector to DB25 male connector.
 Connecting to P76 or TM-U220 series printers





Scale & Indicator Printers

Selectable thermal or needle printers, meet all your weight bill printing demands, different paper rolls for different industries.

Standard with RS232 serial connectors, optional USB and Bluetooth or Ethernet/WiFi interfaces, you can use it for other devices also, some of them with auto cut feature, too

The portable model with rechargeable Li-ion battery of long working time, which allow to work outdoor without main power

Up to 150km working life of the print head, there is no worry about the service and maintenance of them

HiWEIGH

Value Each Gram



P76 Needle

Order Code: #140064 - POS76
Stable printing up to 5,000,000 lines.
76mm or 57mm double/triple layered papers.



P88 Thermal

Order Code: #140117 - P88
88mm receipt paper rolls.
Up to 150km printing life.



P58 Thermal

Order Code: #140118 - P58
58mm receipt paper rolls.
Up to 50km printing life.



P12 Portable

Order Code: #140121 - P12
58mm receipt paper rolls.
Up to 50km printing life.
7.4V1.5Ah Li-ion battery
Fast charge



P201 Label

Order Code: #140119 - P201
Easy to edit print format, multi bar codes support.
Multi-language edit software, label width <58mm.
Printing head of working life up to 50km.



P401 Label

Order Code: #140120 - P401
Easy to edit print format, multi bar codes support.
Multi-language edit software, label width <108mm.
Printing head of working life up to 100km.



2021

