

# WEIGHING INDICATOR



## SPECIFICATIONS




Which makes it work with printer, remote display or other devices.

- Units kg/lb
- Output RS232\*1
- A/D Rate 30 times/second
- Display Resolution 1/60,000
- Operating Temperature -10 °C - 40 °C
- Ingress Protection IP67
- Charger 5V USB Type-C



## FUNCTIONS

- Counting
- Hold
- Classifying
- Animal weighing
- x10 accuracy
- APW
- Multi range selectable
- Linearity calibration selectable
- Multi communication protocols
- PMMA screen protector
- Display 180° rotation installation

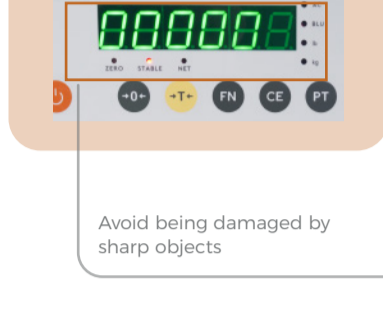

Avoid being damaged by sharp objects



## FEATURES

Can be used directly on the desktop


Four rubber pads



Air and moisture vent



Optional adjustable pole holder

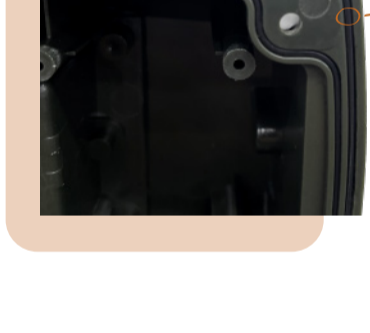

Double O-rings

IP67



5V USB Type-C

Fast respond



## ICONS



## EXCITATIONS

5V USB Type-C Charger

3.7V4Ah Li-ion Battery

100-240V AC (optional)

Power

6\*350Ω

12\*700Ω

Load cell



# WEIGHING INDICATOR