


## SPECIFICATIONS

Material	Carbon steel
Capacity	2000/3000kg
Division	0.2/0.5/1kg
Load Cell	M28/M28M
Cable Length	5m
Bar Width	100mm
Bar Height	90mm
Load Cell Protection	IP67
Operating Temperature	-10 °C - 40 °C



## FEATURES

- Heavy duty double deck design
- Carbon steel with plastic powder coating  
(Provides the best quality for long term durability in harsh environment)
- Capacity up to 3000kg  
(Optional 5000kg model)
- 4 IP67 alloy steel shear beam load cells  
(Optional OIML and NTEP approval)
- Two separated cables with optional Amphenol connector
- 4-wire PVC+PUR cable with stainless steel spring cover  
(Protection from sunlight, oil, cold, rolling and rodents)
- 4 lengths for selection: 400mm, 600mm, 800mm and 1000mm

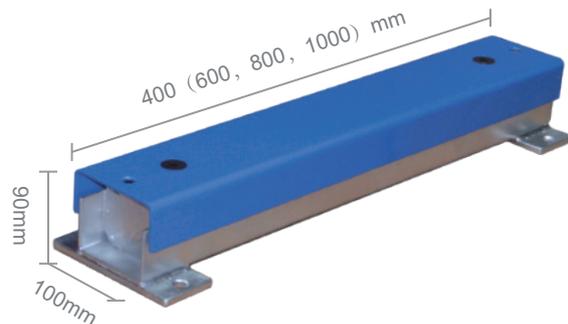

## MODELS

Model	Part No.	Length	Capacity	Division
ABH400	660001	400mm	2000kg	0.2/0.5kg
ABH600	660002	600mm		
ABH800	660003	800mm	3000kg	0.5/1kg
ABH1000	660004	1000mm		

## DIMENSION / mm

Model	size	pack size	G.W/kg	1PC/CTN
ABH400	400x100x90	150x440x520	41	2
ABH600	600x100x90	150x440x720	47.4	2
ABH800	800x100x90	150x440x920	54	2
ABH1000	1000x100x90	150x440x1120	66	2

**ABH**