


SPECIFICATIONS

Material	SUS304 S.S.
Capacity	2000/3000kg
Division	0.2/0.5/1kg
Load Cell	M28B/M28i/M28S
Cable Length	5m
Bar Width	100mm
Bar Height	90mm
Load Cell Protection	IP67
Operating Temperature	-10 °C - 40 °C



FEATURES

- Heavy duty double deck design
- Completely SUS304 stainless steel
(Suitable for animal, food, pharmaceutical, chemical and other special weighing needs)
- Capacity up to 3000kg
- 4 IP67 stainless steel shear beam load cells
(Optional OIML and NTEP approval)
- Two separated cables with optional Amphenol connector
- 4-wire PVC+PUR cable with stainless steel spring cover
(Protection from sunlight, oil, cold, rolling and rodents)
- 4 lengths for selection: 400mm, 600mm, 800mm and 1000mm

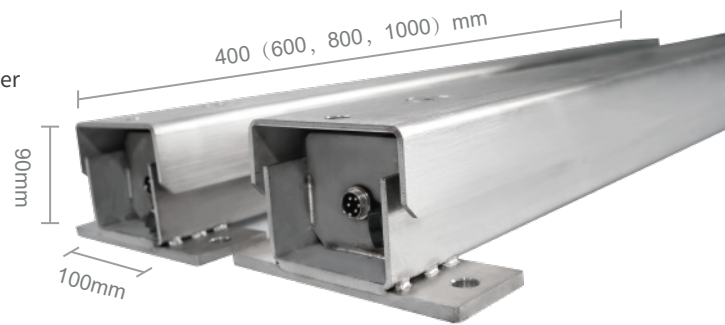

ABS

MODELS

Model	Part No.	Length	Capacity	Division
ABS400	660005	400mm	2000kg	0.2/0.5kg
ABS600	660006	600mm		
ABS800	660007	800mm	3000kg	0.5/1kg
ABS1000	660008	1000mm		

DIMENSION / mm

Model	size	pack size	G.W/kg	1PC/CTN
ABS400	400x100x90	150x440x520	41	2
ABS600	600x100x90	150x440x720	45.4	2
ABS800	800x100x90	150x440x920	52	2
ABS1000	1000x100x90	150x440x1120	63	2