

VALUE EACH GRAM
HiWEIGH
SERIES K1



SPECIFICATIONS

Units	kg/lb
Output	RS232*1
Display Resolution	1/60,000
A/D Rate	30 times/second
Operating Temperature	-10 °C - 40 °C

FUNCTIONS

- Counting
- Hold
- Checkweigh(K1C,K1CS)
- Classifying
- Animal weighing
- x10 accuracy
- APW enhancement
- Multi range selectable
- Linearity calibration selectable
- Multi communication protocols

MODELS

Model	Part No.
K1	101001
K1C	101002
K1S	101003
K1CS	101004

OPTIONAL

Accessories	Part No.
Bluetooth	109004
Bluetooth-(With app)	109005
RS485	109006
4-20mA	109007
USB--K1C/K1CS	109016
WiFi	109017
Adjustable pole holder	109020

FEATURES

- Default with RS232 interface
Which makes it work with printer, remote display or other devices.
- Double O-rings, air and moisture vent
- Fast respond
- PMMA screen protector
Avoid being damaged by sharp objects.
- Display 180° rotation installation
Read the weight from two directions.
- 5V USB Type-C interface for power
Mobile phone charger or any other 5V USB Type-C charger.


EXCITATION

Power

5V USB Type-C Charger
3.7V4Ah Li-ion Battery
100-240V AC (optional)

Load cell

6*350Ω
12*700Ω

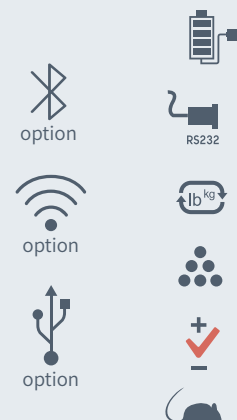



K1
K1C **IP67**

ENCLOSURE

ABS

DISPLAY

Green 0.8" LED (K1)
1.5" FSTN LCD (K1C)

PACK SIZE

1190*720*160mm (8pcs)

WEIGHT

12.2kg (8pcs)



K1S
K1CS **IP67**

ENCLOSURE

SUS304 stainless steel

DISPLAY

Green 0.8" LED (K1S)
1.5" FSTN LCD (K1CS)

PACK SIZE

720*440*520mm (8pcs)

WEIGHT

23kg (8pcs)

