

VALUE EACH GRAM
HiWEIGH
SERIES X1



SPECIFICATIONS

Display	38mm (1.5") LED
Units	kg/lb
Output	RS232*1
Display Resolution	1/3,000-1/30,000
A/D Resolution	100,000
A/D Rate	40 times/second
Operating Temperature	-10 °C - 40 °C

FUNCTIONS

- Counting
- (Peak) Hold
- Totalization
- Animal Weighing
- Zero tracking
- Digital filter
- Power saving

MODELS

Model	Part No.
X1	101023
X1S IP54	101024
X1S IP65	101025
X1P	101026

OPTIONAL

Accessories	Part No.
S.S. bracket(X1)	109001
Relay 2 output	109002
Relay 4 output	109003
Bluetooth-(X1/X1S)	109004
Bluetooth-(With app, X1/X1S)	109005
Ethernet/WiFi-(X1/X1S)	109006
WiFi-(X1/X1S)	109007
RS485	109008
4-20mA	109009

FEATURES

- Large 38mm red LED display
Easy to read from far distance.
- Default with RS232 interface
which makes it work with printer, remote display or other devices.
- The RS232 with continuous output or print output
- The X1 family indicators are widely used for most weighing needs.

EXCITATION

Power


100-240V AC
12V DC Adaptor
Rechargeable Battery

Analog Input Signal

-1-10mV

Load cell

1-4*350Ω
1-8*700Ω

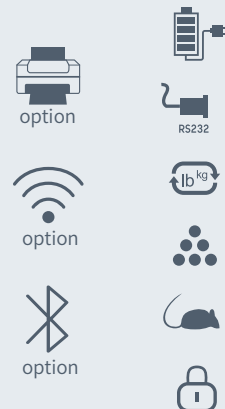



X1

IP54

ENCLOSURE

ABS

BATTERY

6V4Ah

PACK SIZE

480*590*600mm (15pcs)

WEIGHT

29kg(15pcs)

X1S

IP54

IP65

ENCLOSURE

SUS304 stainless steel

BATTERY

6V2.8Ah

PACK SIZE

480*590*600mm (12pcs)

WEIGHT

27kg(12pcs)

X1P

IP54

ENCLOSURE

SUS304 stainless steel

BATTERY


6V2.8Ah

PACK SIZE

540*470*400mm (5pcs)

WEIGHT

18.5kg(5pcs)

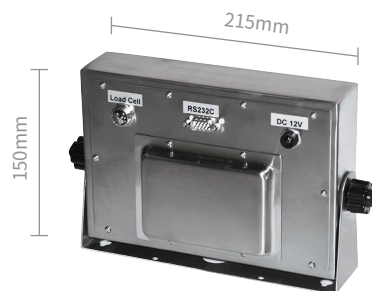

X1P PRINTER

- > Built-in lable printer
- > Lable-edit APP
- > Auto-select of receipt or label printing
- > Easy to edit and print barcode, QR code