


VALUE EACH GRAM  
**HiWEIGH**  
SERIES Y200

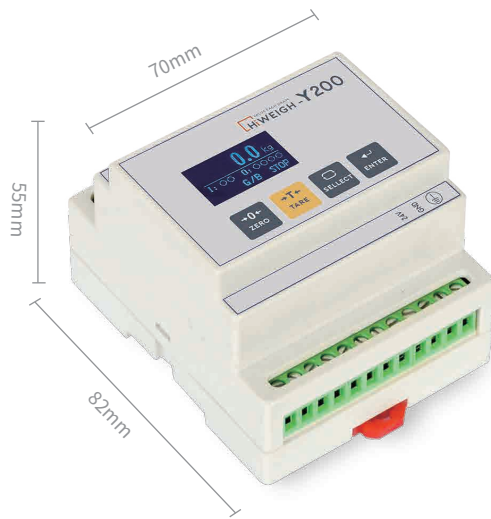

## SPECIFICATIONS

Install Method	Din Rail
Display	OLED
Output	RS232*1 & RS485*1
Display Resolution	100,000
A/D Rate	200 times/second
Operating Temperature	-10 °C - 40 °C

## FUNCTIONS

- Analog output calibration
- Multi-applications:
  - Increasing mode*
  - Decreasing mode*
  - Gross filling mode*
  - Net filling mode*
  - Checkweigh mode*
  - 3 materials receipes*

## MODELS

Model	Part No.
Y200-B	103002
Y200-IO	103003
Y200-DA	103004



16bit D/A output,  
for 0-20mA, 4-20mA, 0-24mA

2 Input and 4 Output

## FEATURES

**IP20**

- Modular design, DIN rail type installation
- 24bit A/D, 200times/s
- Fast respond

## EXCITATION

Power  
24V DC

Load cell  
1-6\*350Q

Minimum input sensitivity  
0.6μV/d

## PACK SIZE

160\*200\*350mm (20pcs)

## WEIGHT

4kg(20pcs)



Modbus-RTU