


VALUE EACH GRAM
HiWEIGH

SERIES Y320

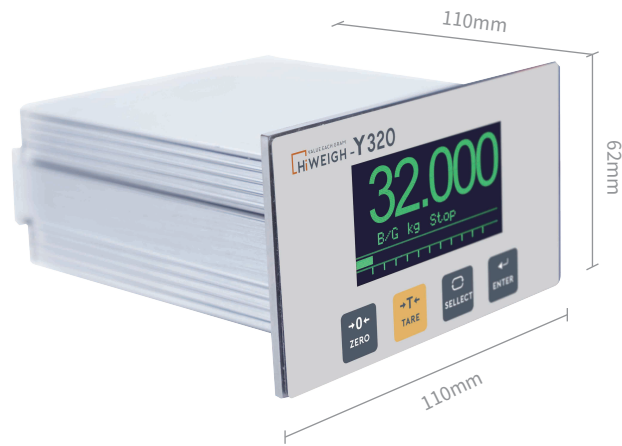

SPECIFICATIONS

Install Method	Panel mounting
Display	Green LED
Output	RS232*1 or RS485*1
Display Resolution	100,000
A/D Rate	200 times/second
Operating Temperature	-10 °C - 40 °C

FUNCTIONS

- Free calibration
- Free setpoint setting
- 1 material fast and fine filling
- 1-4 materials batching
- Auto or manual feeding
- Auto or manual discharging
- Vibration detecting and track

MODELS

Model	Part No.
Y320-B	103005
Y320-IO	103006
Y320-DA	103007
Y320-DP	103008
Y320-PN	103009
Y320-IP	103010
Y320-TCP	103011

DIFFERENCES

- Y320-B: 1*Input and 4*Output
- Y320-IO: 4*Input and 8*Output
- Y320-DA: 16bit D/A output, for 0-5V, 0-10V, -5V+5V, -10V+10V, 0-20mA, 4-20mA, 0-24mA
- Y320-DP: Profibus-DP
- Y320-PN: Profinet-IO
- Y320-IP: Ethernet/IP
- Y320-TCP: Modbus-TCP

Front panel

IP65

FEATURES

- 24bit A/D, 200times/s
- Fast respond
- Percentage weight view
- x10 resolution selectable
- Digital filtering set
- Multi output choices

EXCITATION

Power
24V DC

Load cell
1-6*350Ω

Minimum input sensitivity
0.6μV/d

PACK SIZE

250*250*350mm (20pcs)

WEIGHT

11kg(20pcs)

PROFINET

Modbus-RTU



RS232

PROFINET

Modbus-TCP



RS485

EtherNet/IP®

