

VALUE EACH GRAM  
**HiWEIGH**

# Platform & Bench Scale

ISO9001

VALUE EACH GRAM  
**HiWEIGH** Platform & Bench Scale



VALUE EACH GRAM  
**HiWEIGH**  
*Platform & Bench Scale*

Office Add.: Room 812, Building 3, Tiandu Tower, No. 211 Changjiang Road, Suzhou City, Jiangsu Province, China  
Factory Add.: No. 2649, tianedang Road, Wuzhong District, 215103 Suzhou City, Jiangsu Province, China  
+86-512-67317873 | [www.hiweigh.com](http://www.hiweigh.com) | [info@hiweigh.com](mailto:info@hiweigh.com)

# Platform & Bench Scale

*Different platform sizes and capacities, carbon steel or completely stainless steel, to meet almost all of your basic weighing needs, as well as mechanical platform scales with a capacity of 1000kg.*

- **Models**

BSW	5
BSB	7
BHB	9
BXT	11
BSM	13
AKX	15
ATK	17
BSA	19
BSK	21
BSD	23
LOG	25
BSS	27
FOD	29
BSH	31
K9T	33
AGU	35
TZ	37
MP	38

- **Accessories** ..... 39

- **Customer Assistance** ..... 40



## SPECIFICATIONS

Housing	Mild steel tube structure SUS304 S.S. cover
Capacity	6/15/30/60/150/300/600 kg
Division	1/3,000(approved)--1/15,000
Load Cell	M13M/M15M/M17M
Load Cell Approval	OIML/NTEP
Load Cell Protection	IP65
Platform Size	300x300mm 400x400mm 600x600mm 800x800mm



300x300mm

## MODELS

Model	Part No.	Size	Capacity	L.C.Cert
BSW3006	620101	300x300mm	6kg	OIML NTEP
BSW3015	620102	300x300mm	15kg	
BSW3030	620103	300x300mm	30kg	
BSW4030	620104	400x400mm	30kg	
BSW4060	620105	400x400mm	60kg	
BSW4150	620106	400x400mm	150kg	
BSW6060	620107	600x600mm	60kg	OIML
BSW6150	620108	600x600mm	150kg	
BSW6300	620109	600x600mm	300kg	
BSW8150	620110	800x800mm	150kg	
BSW8300	620111	800x800mm	300kg	
BSW8600	620112	800x800mm	600kg	



400x400mm



600x600mm

## FEATURES


- Capacity up to 600kg
- Rubber supporters and four anti-slip adjusting feet
- OIML/NTEP approved load cells
- Overload protection
- Provide customized platform size



800x800mm

## DIMENSION / mm

Model	a	b	h-min	h-max	pack size	G.W/kg	1PC/CTN
BSW3	300	300	75	85	355*355*170	7	1
BSW4	400	400	125	140	600*530*170	11.5	1
BSW6	600	600	140	155	810*740*180	29	1
BSW8	800	800	185	195	1040*930*180	38	1

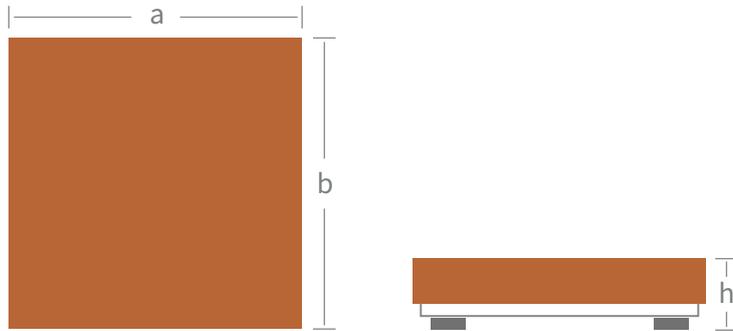

## OPTIONAL

Accessories	Part No.	Details
ISA	109022	Steel base and S.S. pole stand (Diameter 38mm)
ISC	109023	S.S. base and pole stand (Diameter 38mm)
BP1	109024	Steel base and S.S. pole (Diameter 38mm)
BP2	109025	Aluminum base and pole
BP7	109026	Aluminum base and rectangular pole
PFS	109027	S.S. protection rail
PFT	109028	Steel protection rail
ROL	109029	ROL400/ROL500/ROL600/ROL800



ISA



ISC



BP7



BP2



BP1



PFS



PFT



ROL



## SPECIFICATIONS

Material	SUS304 S.S.
Capacity	6/15/30/60/150/300/600 kg
Division	1/3,000(approved)--1/15,000
Load Cell	M13M/M15M/M17M
Load Cell Approval	OIML/NTEP
Load Cell Protection	IP65 IP66 with shield
Platform Size	300x300mm 400x400mm 600x600mm 800x800mm



Plastic M\*C Shield

## MODELS

Model	Part No.	Size	Capacity	L.C.Cert
BSB3006	620113	300x300mm	6kg	OIML NTEP
BSB3015	620114	300x300mm	15kg	
BSB3030	620115	300x300mm	30kg	
BSB4030	620116	400x400mm	30kg	
BSB4060	620117	400x400mm	60kg	
BSB4150	620118	400x400mm	150kg	OIML
BSB6060	620119	600x600mm	60kg	
BSB6150	620120	600x600mm	150kg	
BSB6300	620121	600x600mm	300kg	
BSB8150	620122	800x800mm	150kg	
BSB8300	620123	800x800mm	300kg	
BSB8600	620124	800x800mm	600kg	



S.S M\*SC Shield



M\*C Shield



M\*SC Shield

## FEATURES


- Capacity up to 600kg
- Rubber supporters and four anti-slip adjusting feet
- OIML/NTEP approved load cells
- M\*C or M\*SC load cell shields  
(Waterproof, insect-proof or anti-rodent)
- Overload protection
- Polishing finish, optional sand blasting process
- Provide customized platform size



800x800mm

## DIMENSION / mm

Model	a	b	h-min	h-max	pack size	G.W/kg	1PC/CTN
BSB3	300	300	80	90	355*355*170	7	1
BSB4	400	400	130	145	600*530*170	11.5	1
BSB6	600	600	145	160	810*740*180	29	1
BSB8	800	800	190	200	1040*930*180	38	1

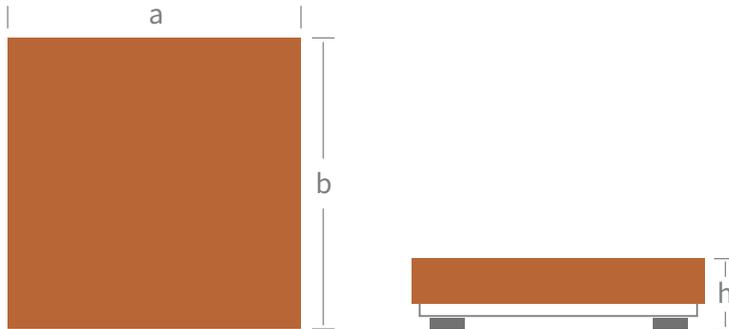

## OPTIONAL

Accessories	Part No.	Details
ISB	109030	Steel base and S.S. pole stand (Diameter 38mm)
ISC	109023	S.S. base and pole stand (Diameter 38mm)
BP4	109031	S.S. base and pole (Diameter 38mm)
BP5	109032	S.S. rectangular pole
BP8	109033	S.S. base and pole (Diameter 38mm)
PFS	109027	S.S. protection rail
PFR	109028	S.S. protection rail
ROL	109029	ROL400/ROL500/ROL600/ROL800



ISB



ISC



BP8



BP5



BP4



PFS



PFR



ROL



## SPECIFICATIONS

Material	SUS304 S.S. Optional SUS316 S.S.
Capacity	6/15/30/60/100 kg
Division	1/3,000(approved)--1/15,000
Load Cell	M14/M14i/M17P
Load Cell Approval	OIML/NTEP
Load Cell Protection	IP65/IP67/IP68&IP69K
Platform Size	300x300mm 400x400mm



## MODELS


Model	Part No.	Size	Capacity	L.C.Cert	L.C.IP
BHB3006L	620125	300x300mm	6kg	OIML NTEP	IP65
BHB3015L	620126	300x300mm	15kg		
BHB3030L	620127	300x300mm	30kg		
BHB4015L	620128	400x400mm	15kg		
BHB4030L	620129	400x400mm	30kg		
BHB4060L	620130	400x400mm	60kg		
BHB4100L	620131	400x400mm	100kg		
BHB3006	620132	300x300mm	6kg	OIML	IP67
BHB3015	620133	300x300mm	15kg		
BHB3030	620134	300x300mm	6kg		
BHB4015	620135	400x400mm	15kg		
BHB4030	620136	400x400mm	30kg		
BHB4060	620137	400x400mm	60kg		
BHB4100	620138	400x400mm	100kg		
BHB3006K	620139	300x300mm	6kg	OIML	IP68&IP69K
BHB3015K	620140	300x300mm	15kg		
BHB3030K	620141	300x300mm	30kg		
BHB4015K	620142	400x400mm	15kg		
BHB4030K	620143	400x400mm	30kg		
BHB4060K	620144	400x400mm	60kg		
BHB4100K	620145	400x400mm	100kg		

## FEATURES

- Capacity up to 100kg
- Anti-impact with buffering springs
- Four anti-slip S.S. adjusting feet
- OIML/NTEP approved load cells
- Overload protection
- Polishing finish, natural S.S color

## DIMENSION / mm

Model	a	b	h-min	h-max	pack size	G.W/kg	1PC/CTN
BHB3	300	300	115	125	460*360*200	7	1
BHB4	400	400	115	125	560*460*220	9	1

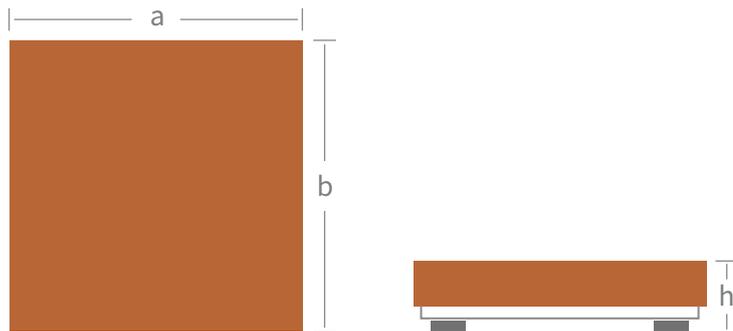

## OPTIONAL

Accessories	Part No.	Details
BP10	109034	S.S. rectangular pole



BP10



## SPECIFICATIONS

Material	SUS304 S.S. SUS316 S.S.
Capacity	6/15/30/60/150/300 kg
Division	1/3,000(approved)--1/15,000
Load Cell	M13P/M17P
Load Cell Approval	CE/OIML/NTEP
Load Cell Protection	IP67/IP68&IP69K
Platform Size	300x300mm 400x400mm 600x600mm



## MODELS


Model	Part No.	Size	Capacity	L.C.Cert	L.C.IP
BXT3006	620146	300x300mm	6kg	OIML	IP67
BXT3015	620147	300x300mm	15kg		
BXT3030	620148	300x300mm	30kg		
BXT4030	620149	400x400mm	30kg	CE	IP67
BXT4060	620150	400x400mm	60kg		
BXT4150	620151	400x400mm	150kg		
BXT6060	620152	600x600mm	60kg	OIML	IP68 & IP69K
BXT6150	620153	600x600mm	150kg		
BXT6300	620154	600x600mm	300kg		
BXT3006K	620155	300x300mm	6kg	CE	IP68 & IP69K
BXT3015K	620156	300x300mm	15kg		
BXT3030K	620157	300x300mm	30kg		
BXT4030K	620158	400x400mm	30kg	OIML NTEP	IP68 & IP69K
BXT4060K	620159	400x400mm	60kg		
BXT4150K	620160	400x400mm	150kg		
BXT6060K	620161	600x600mm	60kg	OIML NTEP	IP68 & IP69K
BXT6150K	620162	600x600mm	150kg		
BXT6300K	620163	600x600mm	300kg		

## FEATURES

- Capacity up to 300kg
- Washdown design, OIML NTEP IP68 & IP69K load cell  
(Easy and safe to clean with water)
- Four anti-slip S.S. adjusting feet
- Silicon buffer pan supports
- Overload protection
- Provide customized platform size
- Perfectly meet the weighing needs of the food, pharmaceutical and other industries.

## DIMENSION / mm

Model	a	b	h-min	h-max	pack size	G.W/kg	1PC/CTN
BHB2	250	250	115	125	695*415*160	8.5	1
BHB3	300	300	115	125	795*415*160	11.5	1
BHB4	400	400	115	125	895*515*160	15.5	1

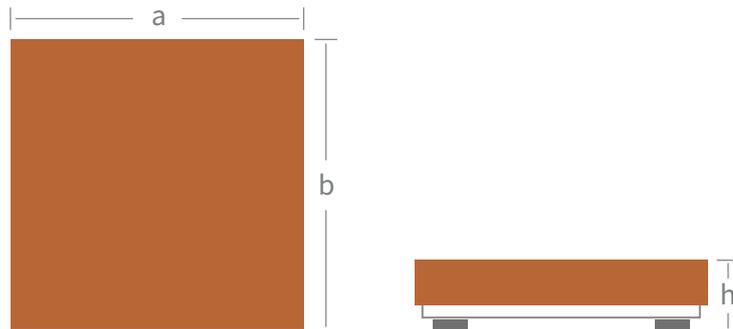

## OPTIONAL

Accessories	Part No.	Details
BP5	109032	S.S. rectangular pole
BP8	109033	S.S. base and pole (Diameter 38mm)



BP5



BP8



## SPECIFICATIONS

Power	100-240V AC 12V DC adaptor Rechargeable battery
Material	Mild steel structure SUS304 S.S. cover and pole
Display	38mm 1.5" LED
Capacity	6/15/30/60/150/200/300/500 kg
Division	1/2/5/10/20/50/100 g
Units	kg/lb
Output	RS232*1
Load Cell	M13/M15/M17
Certification	CE
Load Cell Protection	IP65
Indicator Protection	IP54
Platform Size	300x300mm 300x400mm 400x400mm 400x500mm 500x600mm 600x600mm
Operating Temperature	-10 °C - 40 °C



## FUNCTIONS

Counting  
(Peak) Hold  
Totalization  
Animal weighing

## FEATURES

- X1 indicator with multi functions
- Large 38mm red LED display
- Default with RS232 interface
- Capacity up to 500kg
- Four anti-slip adjusting feet
- Rubber buffer pan supports
- Overload protection
- kg/lb units exchange

## OPTIONAL

Accessories	Part No.
S.S. bracket	109001
Relay 2 output	109002
Relay 4 output	109003
Bluetooth	109004
Bluetooth-(With app)	109005
Ethernet/WiFi	109006
WiFi	109007
RS485	109008
4-20mA	109009




## MODELS

Model	Part No.	Size	Capacity	Division
BSM3006	620164	300x300mm	6kg	1g
BSM3015	620165	300x300mm	15kg	2g
BSM3030	620166	300x300mm	30kg	5g
BSM3030L	620167	300x400mm	30kg	5g
BSM3060L	620168	300x400mm	60kg	10g
BSM3150L	620169	300x400mm	150kg	20g
BSM4030	620170	400x400mm	30kg	5g
BSM4060	620171	400x400mm	60kg	10g
BSM4150	620172	400x400mm	150kg	20g
BSM4060L	620173	400x500mm	60kg	10g
BSM4150L	620174	400x500mm	150kg	20g
BSM4200L	620175	400x500mm	200kg	50g
BSM5060	620176	500x600mm	60kg	10g
BSM5150	620177	500x600mm	150kg	20g
BSM5300	620178	500x600mm	300kg	50g
BSM6150	620179	600x600mm	150kg	20g
BSM6300	620180	600x600mm	300kg	50g
BSM6500	620181	600x600mm	500kg	100g

## DIMENSION / mm


Model	a	b	h	h1	pack size	G.W/kg	1PC/CTN
BSM3*	300	300	120	350	695*415*160	11	1
BSM3*L	300	400	120	450	795*415*160	13	1
BSM4*	400	400	145	450	795*515*160	15	1
BSM4*L	400	500	145	550	895*515*160	18	1
BSM5*	500	600	155	650	996*615*175	25	1
BSM6*	600	600	155	650	995*715*175	30	1

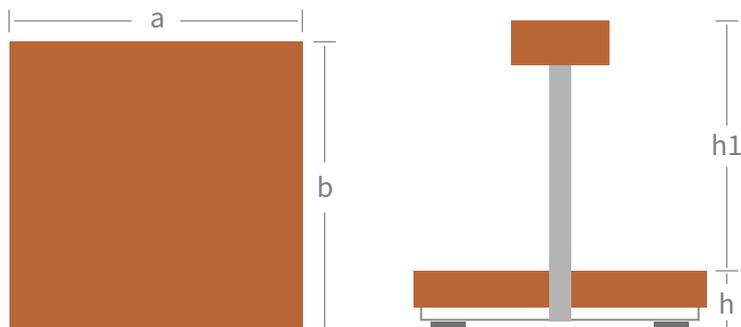



## SPECIFICATIONS

Power	100-240V AC 12V DC adaptor Rechargeable battery
Material	Steel tube structure Stainless steel cover and pole
Display	38mm 1.5" LED
Capacity	15/30/60/150/300/600 kg
Division	2/5/10/20/50/100 g
Units	kg/lb
Output	RS232*1
Load Cell	M15/M17/M19
Load Cell Protection	IP65
Indicator Protection	IP54
Platform Size	300x400mm 400x500mm 500x600mm 600x800mm
Operating Temperature	-10 °C - 40 °C

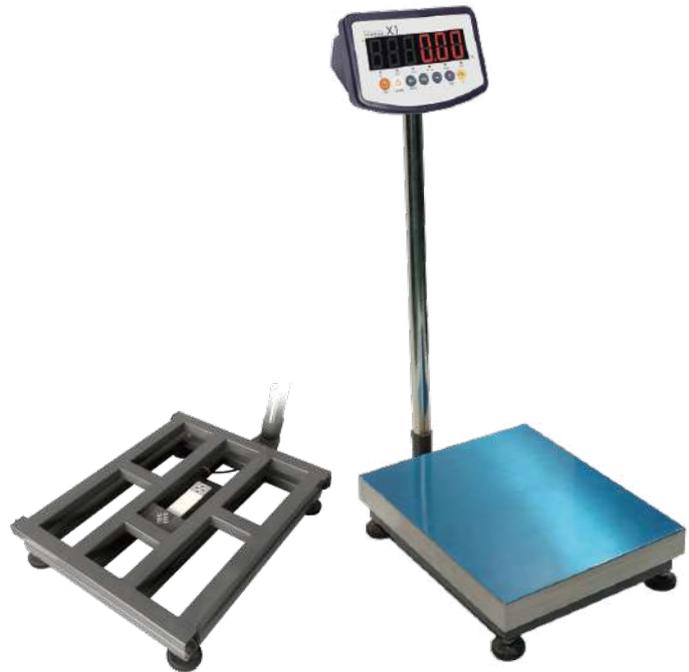

## FUNCTIONS

Counting  
(Peak) Hold  
Totalization  
Animal weighing

## FEATURES

- X1 indicator with multi units and multi functions
- Large 38mm red LED display
- Default with RS232 interface
- Capacity up to 600kg
- High quality IP65 aluminum alloy load cell
- Four anti-slip adjusting feet
- Overload protection

## OPTIONAL

Accessories	Part No.
S.S. bracket	109001
Relay 2 output	109002
Relay 4 output	109003
Bluetooth	109004
Bluetooth-(With app)	109005
Ethernet/WiFi	109006
WiFi	109007
RS485	109008
4-20mA	109009



## MODELS


Model	Part No.	Size	Capacity	Division
AKX3015	620182	300x400mm	15kg	2g
AKX3030	620183	300x400mm	30kg	5g
AKX3060	620184	300x400mm	60kg	10g
AKX4030	620185	400x500mm	30kg	5g
AKX4060	620186	400x500mm	60kg	10g
AKX4150	620187	400x500mm	150kg	20g
AKX5060	620188	500x600mm	60kg	10g
AKX5150	620189	500x600mm	150kg	20g
AKX5300	620190	500x600mm	300kg	50g
AKX6150	620191	600x800mm	150kg	20g
AKX6300	620192	600x800mm	300kg	50g
AKX6600	620193	600x800mm	600kg	100g

L.C.IP

IP65

## DIMENSION / mm

Model	a	b	h	h1	pack size	G.W/kg	1PC/CTN
AKX3*	300	400	125	515	795*415*160	13.5	1
AKX4*	400	500	125	615	895*515*160	17.5	1
AKX5*	500	600	130	620	995*615*175	30.5	1
AKX6*	600	800	150	690	1195*715*205	38.5	1

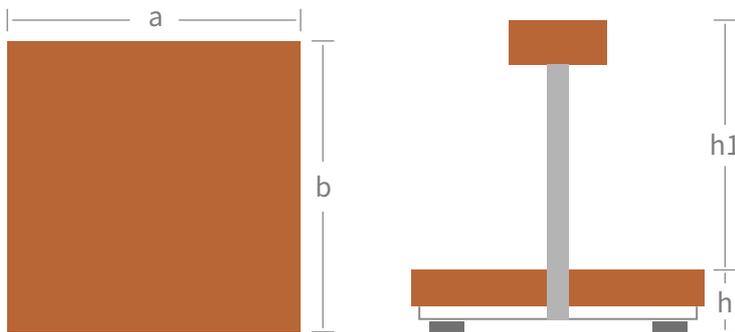



## SPECIFICATIONS

Power	100-240V AC 12V DC adaptor Rechargeable battery
Material	Steel tube structure Stainless steel cover and pole
Display	38mm 1.5" LED
Capacity	15/30/60/150/300/600 kg
Division	5/10/20/50/100 g
Units	kg/lb
Output	RS232*1
Load Cell	M15/M17/M19
Load Cell Protection	IP65
Indicator Protection	IP54
Platform Size	400x500mm 500x600mm 600x800mm
Operating Temperature	-10 °C - 40 °C



## FUNCTIONS

Counting  
(Peak) Hold  
Totalization  
Animal weighing

## FEATURES

- X1 indicator with multi units and multi functions
- Large 38mm red LED display
- Default with RS232 interface
- Capacity up to 600kg
- High quality IP65 aluminum alloy load cell
- Four anti-slip adjusting feet
- Overload protection with Protecting fence

## OPTIONAL

Accessories	Part No.
S.S. bracket	109001
Relay 2 output	109002
Relay 4 output	109003
Bluetooth	109004
Bluetooth-(With app)	109005
Ethernet/WiFi	109006
WiFi	109007
RS485	109008
4-20mA	109009




## MODELS

Model	Part No.	Size	Capacity	Division	L.C.IP
ATK4030	620194	400x500mm	30kg	5g	IP65
ATK4060	620195	400x500mm	60kg	10g	
ATK4150	620196	400x500mm	150kg	20g	
ATK5060	620197	500x600mm	60kg	10g	
ATK5150	620198	500x600mm	150kg	20g	
ATK5300	620199	500x600mm	300kg	50g	
ATK6150	620200	600x800mm	150kg	20g	
ATK6300	620201	600x800mm	300kg	50g	
ATK6600	620202	600x800mm	600kg	100g	

## DIMENSION / mm

Model	a	b	h	h1	pack size	G.W/kg	1PC/CTN
ATK4*	400	500	125	615	895*515*175	18.5	1
ATK5*	500	600	130	620	995*615*200	31.5	1
ATK6*	600	800	150	690	1195*715*200	41.5	1

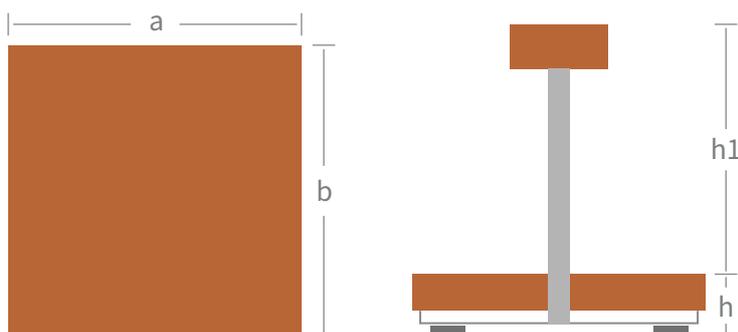

## SPECIFICATIONS

Power	100-240V AC 12V DC adaptor Rechargeable battery
Material	Aluminum alloy structure SUS304 S.S. cover and pole
Display	38mm 1.5" LED
Capacity	30/60/150/300/500 kg
Division	5/10/20/50/100 g
Units	kg/lb
Output	RS232*1
Load Cell	M15/M15M//M17/M17M
Load Cell Approval	OIML/NTEP
Load Cell Protection	IP65
Indicator Protection	IP54
Platform Size	300x400mm 400x500mm 450x600mm
Operating Temperature	-10 °C - 40 °C



## FUNCTIONS

Counting  
(Peak) Hold  
Totalization  
Animal weighing

## FEATURES

- X1 indicator with multi units and multi functions
- Large 38mm red LED display
- Default with RS232 interface
- Capacity up to 500kg
- OIML/NTEP approved load cells
- Four anti-slip adjusting feet
- Overload protection

## OPTIONAL

Accessories	Part No.
S.S. bracket	109001
Relay 2 output	109002
Relay 4 output	109003
Bluetooth	109004
Bluetooth-(With app)	109005
Ethernet/WiFi	109006
WiFi	109007
RS485	109008
4-20mA	109009




## MODELS

Model	Part No.	Size	Capacity	Division	L.C.IP
BSA3030	620203	300x400mm	30kg	5g	IP65
BSA3060	620204	300x400mm	60kg	10g	
BSA3150	620205	300x400mm	150kg	20g	
BSA4060	620206	400x500mm	60kg	10g	
BSA4150	620207	400x500mm	150kg	20g	
BSA4300	620208	400x500mm	300kg	50g	
BSA5150	620209	450x600mm	150kg	20g	
BSA5300	620210	450x600mm	300kg	50g	
BSA5500	620211	450x600mm	500kg	100g	

## DIMENSION / mm

Model	a	b	h	h1	pack size	G.W/kg	1PC/CTN
BSA3*	300	400	110	550	450*370*180	9	1
BSA4*	400	500	130	615	560*470*215	14.5	1
BSA5*	450	600	130	615	650*520*215	18.5	1

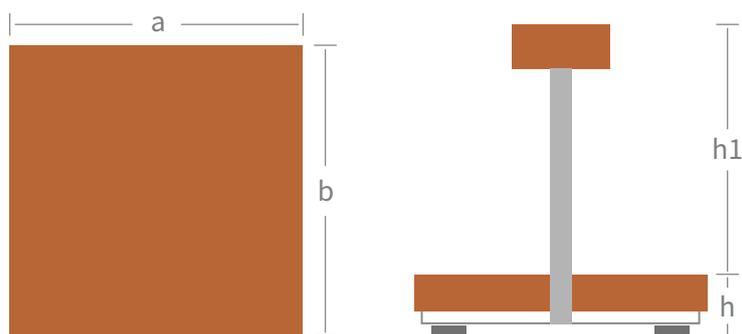



\*to be approved

VALUE EACH GRAM  
**HiWEIGH**

# BSK

## SPECIFICATIONS

Power	5V USB Type-C Charger 3.7V4Ah Li-ion Battery Optional 100-240V AC
Material	Aluminum alloy structure SUS304 S.S. cover and pole
Display	FSTN 1.5" LCD
Capacity	30/60/150/300/500 kg
Division	2/5/10/20/50 g
Units	kg/lb
Output	RS232*1
Load Cell	M15/M17
Load Cell Protection	IP65
Indicator Protection	IP67
Platform Size	300x400mm 400x500mm 450x600mm
Operating Temperature	-10 °C - 40 °C



## FUNCTIONS

Counting  
Hold  
Classifying  
Animal weighing  
x10 accuracy  
APW  
Multi range selectable  
Linearity calibration selectable  
Multi communication protocols



## FEATURES

- K1C indicator with multi units and multi functions
- FSTN 1.5" LCD Display
- Default with RS232 interface
- Capacity up to 500kg
- High quality IP65 aluminum alloy load cell
- Four anti-slip adjusting feet
- Overload protection

## OPTIONAL


Accessories	Part No.
Bluetooth	109004
Bluetooth-(With app)	109005
WiFi	109007
RS485	109008
4-20mA	109009
USB	109021

## MODELS

Model	Part No.	Size	Capacity	Division	L.C.IP
BSK3030	620212	300x400mm	30kg	2g	IP65
BSK3060	620213	300x400mm	60kg	5g	
BSK3150	620214	300x400mm	150kg	10g	
BSK4060	620215	400x500mm	60kg	5g	
BSK4150	620216	400x500mm	150kg	10g	
BSK4300	620217	400x500mm	300kg	20g	
BSK5150	620218	450x600mm	150kg	10g	
BSK5300	620219	450x600mm	300kg	20g	
BSK5500	620220	450x600mm	500kg	50g	

## DIMENSION / mm

Model	a	b	h	h1	pack size	G.W/kg	1PC/CTN
BSK3	300	400	110	545	450*370*180	6.5	1
BSK45	400	500	130	510	560*470*215	12	1
BSK46	450	600	130	490	650*520*215	16	1

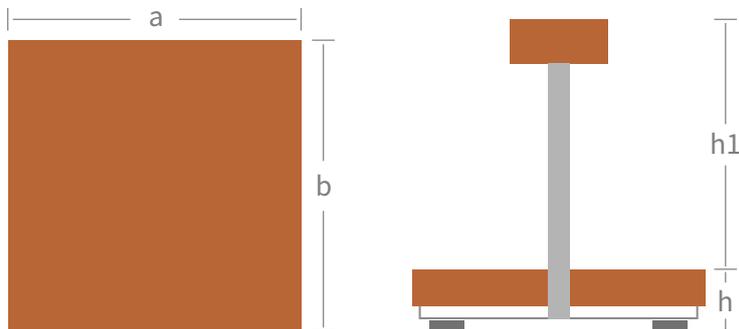



\*to be approved

VALUE EACH GRAM  
**HiWEIGH**

# BSD

## SPECIFICATIONS

Power	5V USB Type-C Charger 3.7V4Ah Li-ion Battery Optional 100-240V AC
Material	Aluminum alloy structure SUS304 S.S. cover and pole
Display	FSTN 1.5" LCD
Capacity	30/60/150/300 kg
Division	2/5/10/20 g
Units	kg/lb
Output	RS232*1
Load Cell	M17
Load Cell Protection	IP65
Indicator Protection	IP67
Platform Size	420x520mm
Operating Temperature	-10 °C - 40 °C



## FUNCTIONS

Counting  
Hold  
Classifying  
Animal weighing  
x10 accuracy  
APW  
Multi range selectable  
Linearity calibration selectable  
Multi communication protocols



## FEATURES

- K1C indicator with multi units and multi functions
- FSTN 1.5" LCD Display
- Default with RS232 interface
- Capacity up to 300kg
- High quality IP65 aluminum alloy load cell
- Four anti-slip adjusting feet
- Overload protection

## OPTIONAL


Accessories	Part No.
Bluetooth	109004
Bluetooth-(With app)	109005
WiFi	109007
RS485	109008
4-20mA	109009
USB	109021

## MODELS

Model	Part No.	Size	Capacity	Division	L.C.IP
BSD4030	620221	450x520mm	30kg	2g	IP65
BSD4060	620222		60kg	5g	
BSD4150	620223		150kg	10g	
BSD4300	620224		60kg	20g	

## DIMENSION / mm

Model	a	b	h	h1	pack size	G.W/kg	1PC/CTN
BSD4	520	420	130	600	910*560*190	19	1
BSD4c	520	420	130	600	910*560*190	19	1

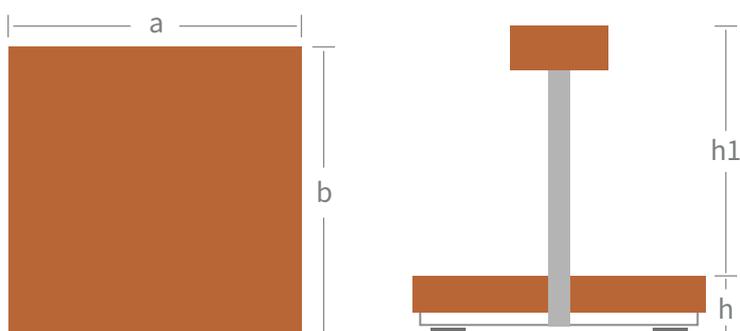



## SPECIFICATIONS

Power	5V USB Type-C Charger 3.7V4Ah Li-ion Battery Optional 100-240V AC
Material	Aluminum structure Stainless steel cover
Display	FSTN 1.5" LCD
Capacity	6/15/30/60/150 kg
Division	1/2/5/10/20 g
Units	kg/lb
Output	RS232*1
Load Cell	M17
Load Cell Protection	IP65
Indicator Protection	IP67
Platform Size	280x380mm
Operating Temperature	-10 °C - 40 °C



## FUNCTIONS

- Counting
- Hold
- Classifying
- Animal weighing
- x10 accuracy
- APW
- Multi range selectable
- Linearity calibration selectable
- Multi communication protocols

## FEATURES

- K1C indicator with multi units and multi functions
- FSTN 1.5" LCD Display
- Default with RS232 interface
- Capacity up to 150kg
- High quality IP65 aluminum alloy load cell
- Portable design with handle
- Four anti-slip adjusting feet
- Overload protection

## OPTIONAL

Accessories	Part No.
Bluetooth	109004
Bluetooth-(With app)	109005
WiFi	109007
RS485	109008
4-20mA	109009
USB	109021




## MODELS

Model	Part No.	Size	Capacity	Division	L.C.IP
LOG3006	620225	280x380mm	6kg	1g	IP65
LOG3015	620226		15kg	2g	
LOG3030	620227		30kg	5g	
LOG3060	620228		60kg	10g	
LOG3150	620229		150kg	20g	

## DIMENSION / mm

Model	a	b	h	pack size	G.W/kg	1PC/CTN
LOG	280	380	130	575*425*160	17	1

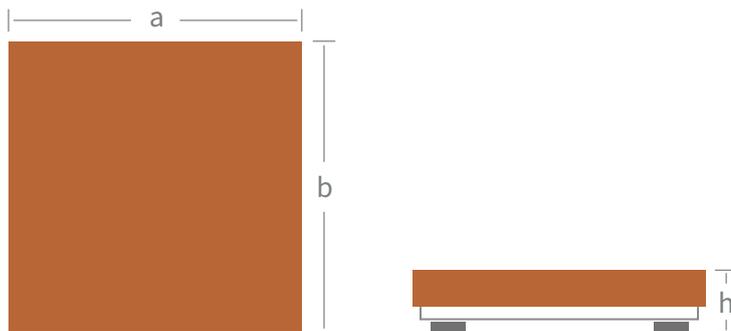

## SPECIFICATIONS

Power	100-240V AC 6V2.8Ah Rechargeable Battery
Material	SUS304 S.S.
Display	Backlit FSTN LCD
Capacity	6/15/30/60/150/200/300/500 kg
Division	1/2/5/10/20/50/100 g
Units	kg   lb   g   oz
Output	2*RS232
Load Cell	M14i/M17P
Load Cell Protection	IP66/IP68&IP69K
Indicator Protection	IP65
Platform Size	300x300mm 300x400mm 400x400mm 400x500mm 500x600mm 600x600mm
Operating Temperature	-10 °C - 40 °C



## FUNCTIONS

Zero/Tare  
Hold  
Counting  
Checkweigh  
Accumulation  
Animal weighing  
x10 accuracy

## FEATURES

- K7S indicator with multi units and multi functions
- 37mm backlit FSTN LCD display
- Default with double RS232 interface
- Accumulate up to 2000 records
- Capacity up to 500kg
- OIML/NTEP approved load cells
- M\*SC load cell shields  
(Waterproof, insect-proof or anti-rodent)
- Four anti-slip adjusting feet
- Rubber buffer pan supports
- Overload protection

## OPTIONAL

Accessories	Part No.
Relay 4 output	109003
Bluetooth	109004
Bluetooth-(With app)	109005
Ethernet/WiFi	109006
WiFi	109007
4-20mA	109009




## MODELS

Model	Part No.	Size	Capacity	Division	L.C.IP	
BSS3006	620230	300x300mm	6kg	1g	IP66	
BSS3015	620231		15kg	2g		
BSS3030	620232		30kg	5g		
BSS3030L	620233	300x400mm	30kg	5g		
BSS3060L	620234		60kg	10g		
BSS3150L	620235		150kg	20g		
BSS4030	620236	400x400mm	30kg	5g	IP68&IP69K	
BSS4060	620237		60kg	10g		
BSS4150	620238		150kg	20g		
BSS4060L	620239	400x500mm	60kg	10g		
BSS4150L	620240		150kg	20g		
BSS4200L	620241		200kg	20g		
BSS5060	620242	500x600mm	60kg	10g	IP68&IP69K	
BSS5150	620243		15kg	20g		
BSS5300	620244		300kg	50g		
BSS6150	620245	600x600mm	150kg	20g		IP68&IP69K
BSS6300	620246		300kg	50g		
BSS6500	620247		500kg	100g		

## DIMENSION / mm

Model	a	b	h	h1	pack size	G.W/kg	1PC/CTN
BSS33	300	300	120	350	695*415*160	13	1
BSS34	300	400	120	450	795*415*160	15	1
BSS44	400	400	145	450	795*515*160	17	1
BSS45	400	500	145	550	895*515*160	20	1
BSS56	500	600	155	650	995*615*175	27	1
BSS66	600	600	155	650	995*715*175	32	1

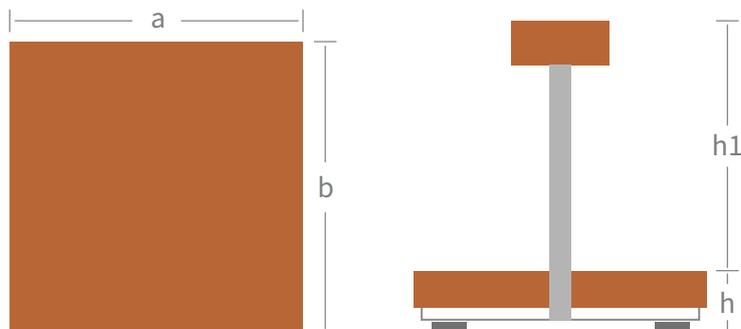



## SPECIFICATIONS

Material	100-240V AC 6V2.8Ah Rechargeable Battery
Material	SUS304 S.S.
Display	Backlit FSTN LCD
Capacity	6/15/30/60/150 kg
Division	1/2/5/10/20 g
Units	kg   lb   g   oz
Output	2*RS232
Load Cell	M13/M15
Load Cell Protection	IP66
Indicator Protection	IP65
Platform Size	315x315mm
Operating Temperature	-10 °C - 40 °C



## FUNCTIONS

Zero/Tare  
Hold  
Counting  
Checkweigh  
Accumulation  
Animal weighing  
x10 accuracy

## FEATURES

- K7S indicator with multi units and multi functions
- 37mm backlit FSTN LCD display
- Default with double RS232 interface
- Accumulate up to 2000 records
- Capacity up to 150kg
- OIML/NTEP approved load cells
- Four anti-slip adjusting feet
- Overload protection

## OPTIONAL

Accessories	Part No.
Relay 4 output	109003
Bluetooth	109004
Bluetooth-(With app)	109005
Ethernet/WiFi	109006
WiFi	109007
4-20mA	109009




## MODELS

Model	Part No.	Size	Capacity	Division	L.C.IP
FOD3006	620248	315x315mm	6kg	1g	IP66
FOD3015	620249		15kg	2g	
FOD3030	620250		30kg	5g	
FOD3060	620251		60kg	10g	
FOD3150	620252		150kg	20g	

## DIMENSION / mm

Model	a	b	h	h1	pack size	G.W/kg	1PC/CTN
FOD	315	315	150	400	475*415*160	10	1

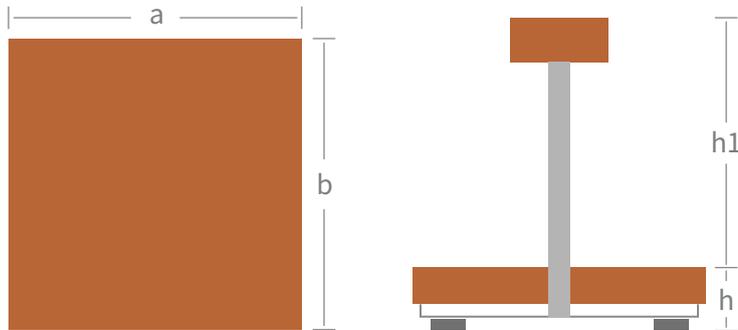



## SPECIFICATIONS

Material	100-240V AC 6V2.8Ah Rechargeable Battery
Material	SUS304 S.S.
Display	Backlit FSTN LCD
Capacity	6/15/30/60/100 kg
Division	1/2/5/10/20 g
Units	kg   lb   g   oz
Output	2*RS232
Load Cell	M14i
Load Cell Protection	IP66
Indicator Protection	IP65
Platform Size	300x300mm 400x400mm
Operating Temperature	-10 °C - 40 °C



## FUNCTIONS

- Zero/Tare
- Hold
- Counting
- Checkweigh
- Accumulation
- Animal weighing
- x10 accuracy

## FEATURES

- K7S indicator with multi units and multi functions
- 37mm backlit FSTN LCD display
- Default with double RS232 interface
- Accumulate up to 2000 records
- Capacity up to 100kg
- OIML/NTEP approved load cells
- Four anti-slip adjusting feet
- Anti-impact with buffering springs
- Overload protection

## OPTIONAL

Accessories	Part No.
Relay 4 output	109003
Bluetooth	109004
Bluetooth-(With app)	109005
Ethernet/WiFi	109006
WiFi	109007
4-20mA	109009




## MODELS

Model	Part No.	Size	Capacity	Division	L.C.IP
BSH3006	620253	300x300mm	6kg	1g	IP66
BSH3015	620254		15kg	2g	
BSH3030	620255		30kg	5g	
BSH4015	620256	400x400mm	15kg	2g	
BSH4030	620257		30kg	5g	
BSH4060	620258		60kg	10g	
BSH4100	620259		100kg	20g	

## DIMENSION / mm

Model	a	b	h	h1	pack size	G.W/kg	1PC/CTN
BSH3	300	300	100	480	795*515*160	6	1
BSH4	400	400	100	480	560*460*220	8	1

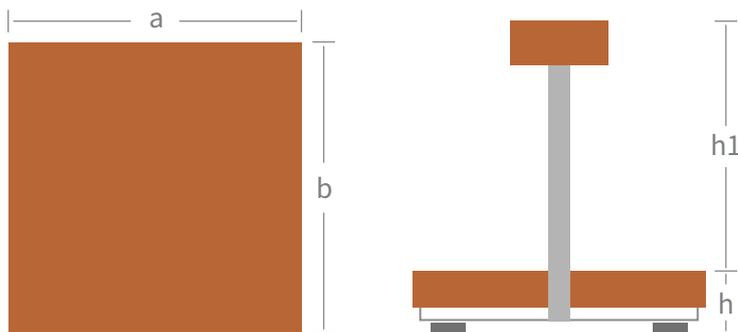



## SPECIFICATIONS

Material	100-240V AC 9-24V DC 6V1.2Ah / 7.4V6.8Ah Rechargeable Battery
Material	SUS316 S.S.
Display	Backlit FSTN LCD
Capacity	6/15/30/60/150 kg
Division	1/2/5/10/20 g
Units	kg   lb   g   oz
Output	RS232*2
Load Cell	M13P/M15P/M17P
Load Cell Protection	IP68 & IP69K
Indicator Protection	IP68 & IP69K
Platform Size	300x300mm 400x400mm 400x500mm
Operating Temperature	-10 °C - 40 °C



## FUNCTIONS

Hold  
Checkweigh  
Animal weighing  
Counting  
x10 accuracy  
Shortcut keys settings  
Continuous and stable output  
Multi communication protocols

## FEATURES

- K9 indicator with multi units and multi functions
- Big backlit FSTN LCD display
- Default with double RS232 interface
- Washdown design, OIML NTEP IP68 & IP69K load cell (Easy and safe to clean with water)
- Capacity up to 150kg
- Four anti-slip S.S. adjusting feet
- Silicon buffer pan supports
- Overload protection
- Provide customized platform size
- Perfectly meet the weighing needs of the food, pharmaceutical and other industries.

## OPTIONAL

Accessories	Part No.
WiFi	109007
Bluetooth	109016
USB	109017
Alarming light	109019
Pedal or mechanical switch	109020




## MODELS

Model	Part No.	Size	Capacity	Division	L.C.IP
K9T3006	620260	300x300mm	6kg	1g	IP68 & IP69K
K9T3015	620261		15kg	2g	
K9T3030	620262		30kg	5g	
K9T4030	620263	400x400mm	30kg	5g	
K9T4060	620264		60kg	10g	
K9T4150	620265	400x500mm	150kg	20g	
K9T5030	620266		30kg	5g	
K9T5060	620267		60kg	10g	
K9T5150	620268		150kg	20g	

## DIMENSION / mm

Model	a	b	h	h1	pack size	G.W/kg	1PC/CTN
K9T3	300	300	150	600	695*415*160	11.5	1
K9T4	400	400	162	620	795*415*160	17.5	1

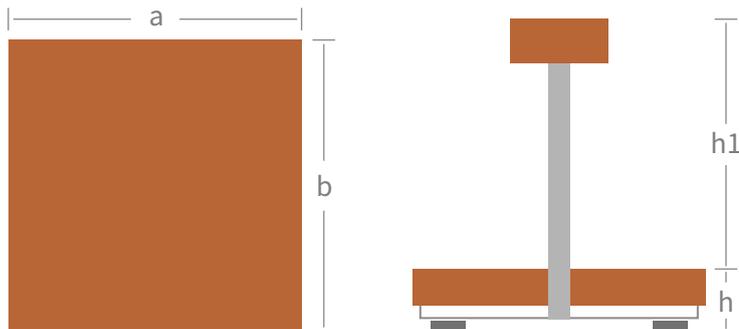



## SPECIFICATIONS

Power	5V USB Type-C Charger 3.7V4Ah Li-ion Battery Optional 100-240V AC
Material	Plastic/steel platform SUS304 S.S. cover
Display	FSTN 1.5" LCD
Capacity	50/100/200 kg
Division	2/5/10 g
Units	kg/lb
Output	RS232*1
Load Cell	Special sealed load cell module
Load Cell Protection	IP67
Indicator Protection	IP67
Platform Size	300x400mm 400x500mm
Operating Temperature	-10 °C - 40 °C



## FUNCTIONS

Counting  
Hold  
Classifying  
Animal weighing  
x10 accuracy  
APW  
Multi range selectable  
Linearity calibration selectable  
Multi communication protocols



## FEATURES

- K1C indicator with multi units and multi functions
- FSTN 1.5" LCD Display
- Default with RS232 interface
- Capacity up to 200kg
- High quality IP67 special sealed load cell module
- Four anti-slip adjusting feet
- Overload protection

## OPTIONAL


Accessories	Part No.
Bluetooth	109004
Bluetooth-(With app)	109005
WiFi	109007
RS485	109008
4-20mA	109009
USB	109021

## MODELS

Model	Part No.	Size	Capacity	Division	L.C.IP
AGU3050	620269	300x400mm	50kg	2g	IP67
AGU3100	620270		100kg	5g	
AGU4100	620271	400x500mm	100kg	5g	
AGU4200	620272		200kg	10g	

## DIMENSION / mm

Model	a	b	h	h1	pack size	G.W/kg	1PC/CTN
AGU3	300	400	160	500	810*380*225	14	1
AGU4	400	500	160	600	910*480*230	20	1

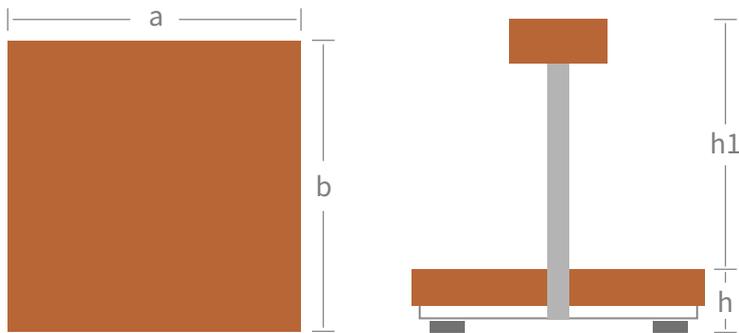

## SPECIFICATIONS

Material	Cast iron
Display	Double large dial
Capacity	100/150/500 kg
Division	100/200/1000 g
Units	kg/lb
Platform Size	300x400mm 450x600mm



## FEATURES



- Double large dial display
- Heavy duty cast iron structure
- Capacity up to 500kg
- TZ500 with protecting rail
- Four rugged moveable wheels
- Lock switch on column
- Adjustment kit on top
- Optional customized colors

## MODELS

Model	Part No.	Size	Capacity	Division
TZ100	620274	300x400mm	100kg	100g
TZ150	620275	300x400mm	150kg	200g
TZ500	620276	450x600mm	500kg	1000g

## DIMENSION / mm

Model	a	b	h	h1	pack size	G.W/kg	1PC/CTN
TZ1	300	400	110	890	950*360*260	21	1
TZ5	450	600	180	1050	1130*390*140	50	1

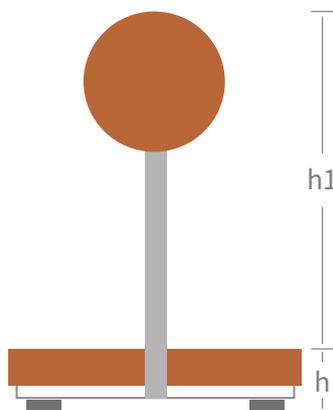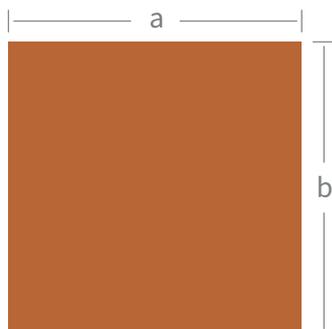



## SPECIFICATIONS

Material	Cast iron Moulded platform and wheels Rectangular column
Capacity	500/1000 kg
Division	200/500 g
Units	kg/lb
Platform Size	450x600mm 600x640mm 600x800mm

## FEATURES



- Heavy duty mechanical cast iron moulded platform scale
- Capacity up to 500kg/1000kg
- Four cast iron rugged wheels
- Optional customized colors

## MODELS

Model	Part No.	Size	Capacity	Division
MP4560	620277	450x600mm	500kg	200g
MP4560b	620278	450x600mm	500kg/1102lb	200g/0.44lb
MP6064	620279	600x640mm	500kg	200g
MP6064b	620280	600x640mm	500kg/1102lb	200g/0.44lb
MP6080	620281	600x800mm	1000kg	500g
MP6080b	620282	600x800mm	1000kg/2205lb	500g/1.1lb

## DIMENSION / mm

Model	a	b	h	h1	pack size	G.W/kg	1PC/CTN
MP4560	450	600	180	905	960*650*180	61	1
MP6064	600	640	180	905	960*730*210	83	1
MP6080	600	800	180	905	1210*780*220	122	1

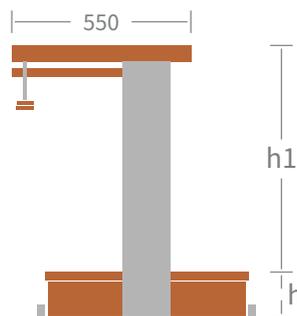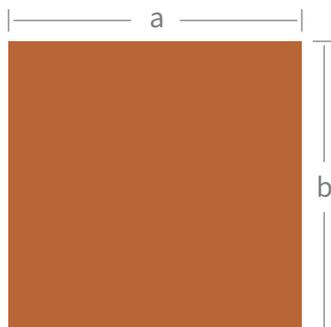



### RBlue

**Part No.** 134001 - RS232 to Bluetooth

- Comes with Android APP
- Weight data recording in excel format
- Multi-brand serial protocols
- Adapt to all indicators except X1P



### DRecorder

**Part No.** 134002 - Data Recorder

- Store the information output by RS232 to USB flash drive or TF memory card in CSV/TXT format
- Adapt to all indicators except X1P



### P401 Thermal

**Part No.** 130001

- Barcode label printer
- Paper width of 25.4-108mm
- USB-RS232 interface
- Working with indicators directly
- Multi-language editing software



### PT2 Thermal

**Part No.** 130003

- Portable thermal printer
- Working with 57mm paper
- USB-RS232 interface



### MDS



Part No.	Model	LED	IP	Material	Features
131001	MDS3	3"			<ul style="list-style-type: none"> <li>• 6 different models of LED display.</li> <li>• High luminance and good stability.</li> <li>• Working with indicators of most indicator brands, like HiWEIGH, Moorange, Mettler Toledo*, Vishay*, Sartorius*, Rice Lake*, Flintec*, CAS*, Ohaus*, etc.</li> </ul> <p><small>* Indicator models need to be informed upon order placed. * All brands and referred property belong to respective trademark holders.</small></p>
131002	MDS5	5"	IP54	SUS201 S.S.	
131003	MDS8	8"			
131004	MDSS1.2	1.2"			
131005	MDSS3	3"	IP65	SUS304 S.S.	
131006	MDSS5	5"			

## Sales Management



Eileen - Europe & Middle East  
LNG

+86-18916600623  
 eileen@hiweigh.com

## Technical Service



Kevin  
LNG

+86-18020220824  
 tech@hiweigh.com

## Marketing Management



Rae - Asia & Oceania  
LNG

+86-18106218321  
 rae@hiweigh.com



Luna

+86-18115501380  
 luna@hiweigh.com

## Production Management



Mary - North America & Africa  
LNG

+86-18051829623  
 mary@hiweigh.com



Danny

+86-18118127735  
 info@hiweigh.com



Wanda - Latin America  
LNG

+86-18115501352  
 es@hiweigh.com



Jerry

+86-13913484008  
 info@hiweigh.com



VALUE EACH GRAM  
**HiWEIGH**

*Platform & Bench Scale*



# Platform & Bench Scale

Office Add.: Room 812, Building 3, Tiandu Tower, No. 211 Changjiang Road, Suzhou City, Jiangsu Province, China  
Factory Add.: No. 2649, tianedang Road, Wuzhong District, 215103 Suzhou City, Jiangsu Province, China  
+86-512-67317873 | [www.hiweigh.com](http://www.hiweigh.com) | [info@hiweigh.com](mailto:info@hiweigh.com)