

VALUE EACH GRAM  
**HiWEIGH**

# Waterproof Scale

ISO9001

VALUE EACH GRAM  
**HiWEIGH** Waterproof Scale



VALUE EACH GRAM  
**HiWEIGH**  
*Waterproof Scale*

Office Add.: Room 812, Building 3, Tiandu Tower, No. 211 Changjiang Road, Suzhou City, Jiangsu Province, China  
Factory Add.: No. 2649, tianedang Road, Wuzhong District, 215103 Suzhou City, Jiangsu Province, China  
+86-512-67317873 | [www.hiweigh.com](http://www.hiweigh.com) | [info@hiweigh.com](mailto:info@hiweigh.com)

# Waterproof Scale

*IP68 SUS304 stainless steel housing, perfectly suitable for pre-packaged weighing solutions for food, meat, fish, chemical raw materials, etc. The high precision of 0.02g can even be used as a stainless steel laboratory balance.*

● FSS	.....	5
● ISS	.....	6
● WSS	.....	7
● WPS	.....	8
● Customer Assistance	.....	9



## FEATURES

- Stainless steel housing, easy to clean
- Bright green LED display
- 4 adjustable feet
- High accuracy up to 1/15,000 divisions
- Battery voltage indication
- Perfect for weighing seafood, meat, chemicals and other materials
- Optional RS232 output

## FUNCTIONS

Zero/Tare  
Counting  
Checkweigh  
Adjustable Weighing speed

## SPECIFICATIONS

Power	100/110V or 220/240V Power Adaptor 6V4Ah Rechargeable Battery
Housing	SUS304 stainless steel
Display	0.8" green LED
Protection	IP68
Capacity	3/6/15/30 kg
Division	0.2/0.5/1/2 g
Units	kg, lb, lb.oz
Accuracy	Class III
Pan Size	240x180mm
Operating Temperature	-10 °C - 40 °C



## MODELS

Model	Part No.	Capacity	Division
FSS3	640207	3kg	0.2g
FSS6	640208	6kg	0.5g
FSS15	640209	15kg	1g
FSS30	640210	30kg	2g

### PACK SIZE

580\*330\*320mm (4pcs)

### WEIGHT

14kg(4pcs)





VALUE EACH GRAM  
**HiWEIGH**

**ISS**

## FEATURES

- Stainless steel compact housing, easy to clean
- Bright backlight LCD display (Adjustable backlight level)
- 4 adjustable feet
- High accuracy up to 1/15,000 divisions
- 300g-1500g models can work in professional labs, as a stainless steel lab balance.
- 3kg-15kg model is perfect for restaurants, delicatessen, meat processing plants, seafood sorting, etc.

## FUNCTIONS

Counting  
Checkweigh  
Animal weighing  
Adjustable read division  
Power saving  
Auto zero

## SPECIFICATIONS

Power	110~240V AC 6V2.3Ah Rechargeable Battery
Housing	SUS304 stainless steel
Display	LCD display with backlight
Protection	IP68
Capacity	300/600/1500 g 3/6/15 kg
Division	0.02/0.05/0.1/0.2/0.5/1 g
Units	kg/lb/g/oz
Accuracy	Class III
Operating Temperature	-5 °C - 35 °C



### PACK SIZE

580\*330\*320mm (4pcs)

### WEIGHT

14kg(4pcs)

## MODELS

Model	Part No.	Capacity	Division
ISS300	640201	300g	0.02g
ISS600	640202	600g	0.05g
ISS1500	640203	1500g	0.1g
ISS3	640204	3kg	0.2g
ISS6	640205	6kg	0.5g
ISS15	640206	15kg	1g



VALUE EACH GRAM  
**HiWEIGH**  
**WSS**



## FEATURES

- Stainless steel housing, easy to clean
- Double red LED display
- 4 adjustable feet
- High accuracy up to 1/15,000 divisions
- Battery voltage indication
- Perfect for weighing seafood, meat, chemicals and other materials

## FUNCTIONS

- Counting
- Checkweigh
- Animal weighing
- Adjustable read division
- Power saving
- Auto zero

## SPECIFICATIONS

Power	110V or 220V AC 6V4Ah Rechargeable Battery
Housing	SUS304 stainless steel
Display	0.8" red LED
Protection	IP68
Capacity	3/6/15/30 kg
Division	0.2/0.5/1/2 g
Units	kg/lb/g/oz/pcs
Accuracy	Class III
Pan Size	230x190mm
Operating Temperature	-5 °C - 35 °C



## MODELS

Model	Part No.	Capacity	Division
WSS3	640211	3kg	0.2g
WSS6	640212	6kg	0.5g
WSS15	640213	15kg	1g
WSS30	640214	30kg	2g

### PACK SIZE

340\*270\*150mm (1pcs)

### WEIGHT

4.2kg(1pcs)



VALUE EACH GRAM  
**HiWEIGH**  
WPS



## FEATURES

- Waterproof, moisture-proof and good vibration resistance
- Fast and accurate weighing
- Double red LED display
- Adjustable LED brightness
- 4 adjustable feet
- High accuracy up to 1/15,000 divisions
- Ideal for scenarios such as production lines that require fast weighing and packaging

## FUNCTIONS

Zero/Tare  
Auto zero  
Counting  
Checkweigh  
Power saving  
Program zero tracking  
Adjustable respond speed

## SPECIFICATIONS

Power	110V or 240V AC 6V4Ah Rechargeable Battery
Housing	ABS
Display	0.8" red LED
Protection	IP68
Capacity	3/6/15/30 kg
Division	0.2/0.5/1/2 g
Units	kg/lb/g/oz
Accuracy	Class III
Pan Size	255x195mm
Operating Temperature	-10 °C - 40 °C



## MODELS

Model	Part No.	Capacity	Division
WPS3	640215	3kg	0.2g
WPS6	640216	6kg	0.5g
WPS15	640217	15kg	1g
WPS30	640218	30kg	2g

### PACK SIZE

370\*320\*200mm (1pcs)

### WEIGHT

4kg(1pcs)



## Sales Management



Eileen - Europe & Middle East  
LNG

+86-18916600623  
 eileen@hiweigh.com

## Technical Service



Kevin  
LNG

+86-18020220824  
 tech@hiweigh.com

## Marketing Management



Rae - Asia & Oceania  
LNG

+86-18106218321  
 rae@hiweigh.com



Luna

+86-18115501380  
 luna@hiweigh.com

## Production Management



Mary - North America & Africa  
LNG

+86-18051829623  
 mary@hiweigh.com



Danny

+86-18118127735  
 info@hiweigh.com



Wanda - Latin America  
LNG


+86-18115501352  
 es@hiweigh.com



Jerry

+86-13913484008  
 info@hiweigh.com

VALUE EACH GRAM  
**HiWEIGH**  
*Waterproof Scale*

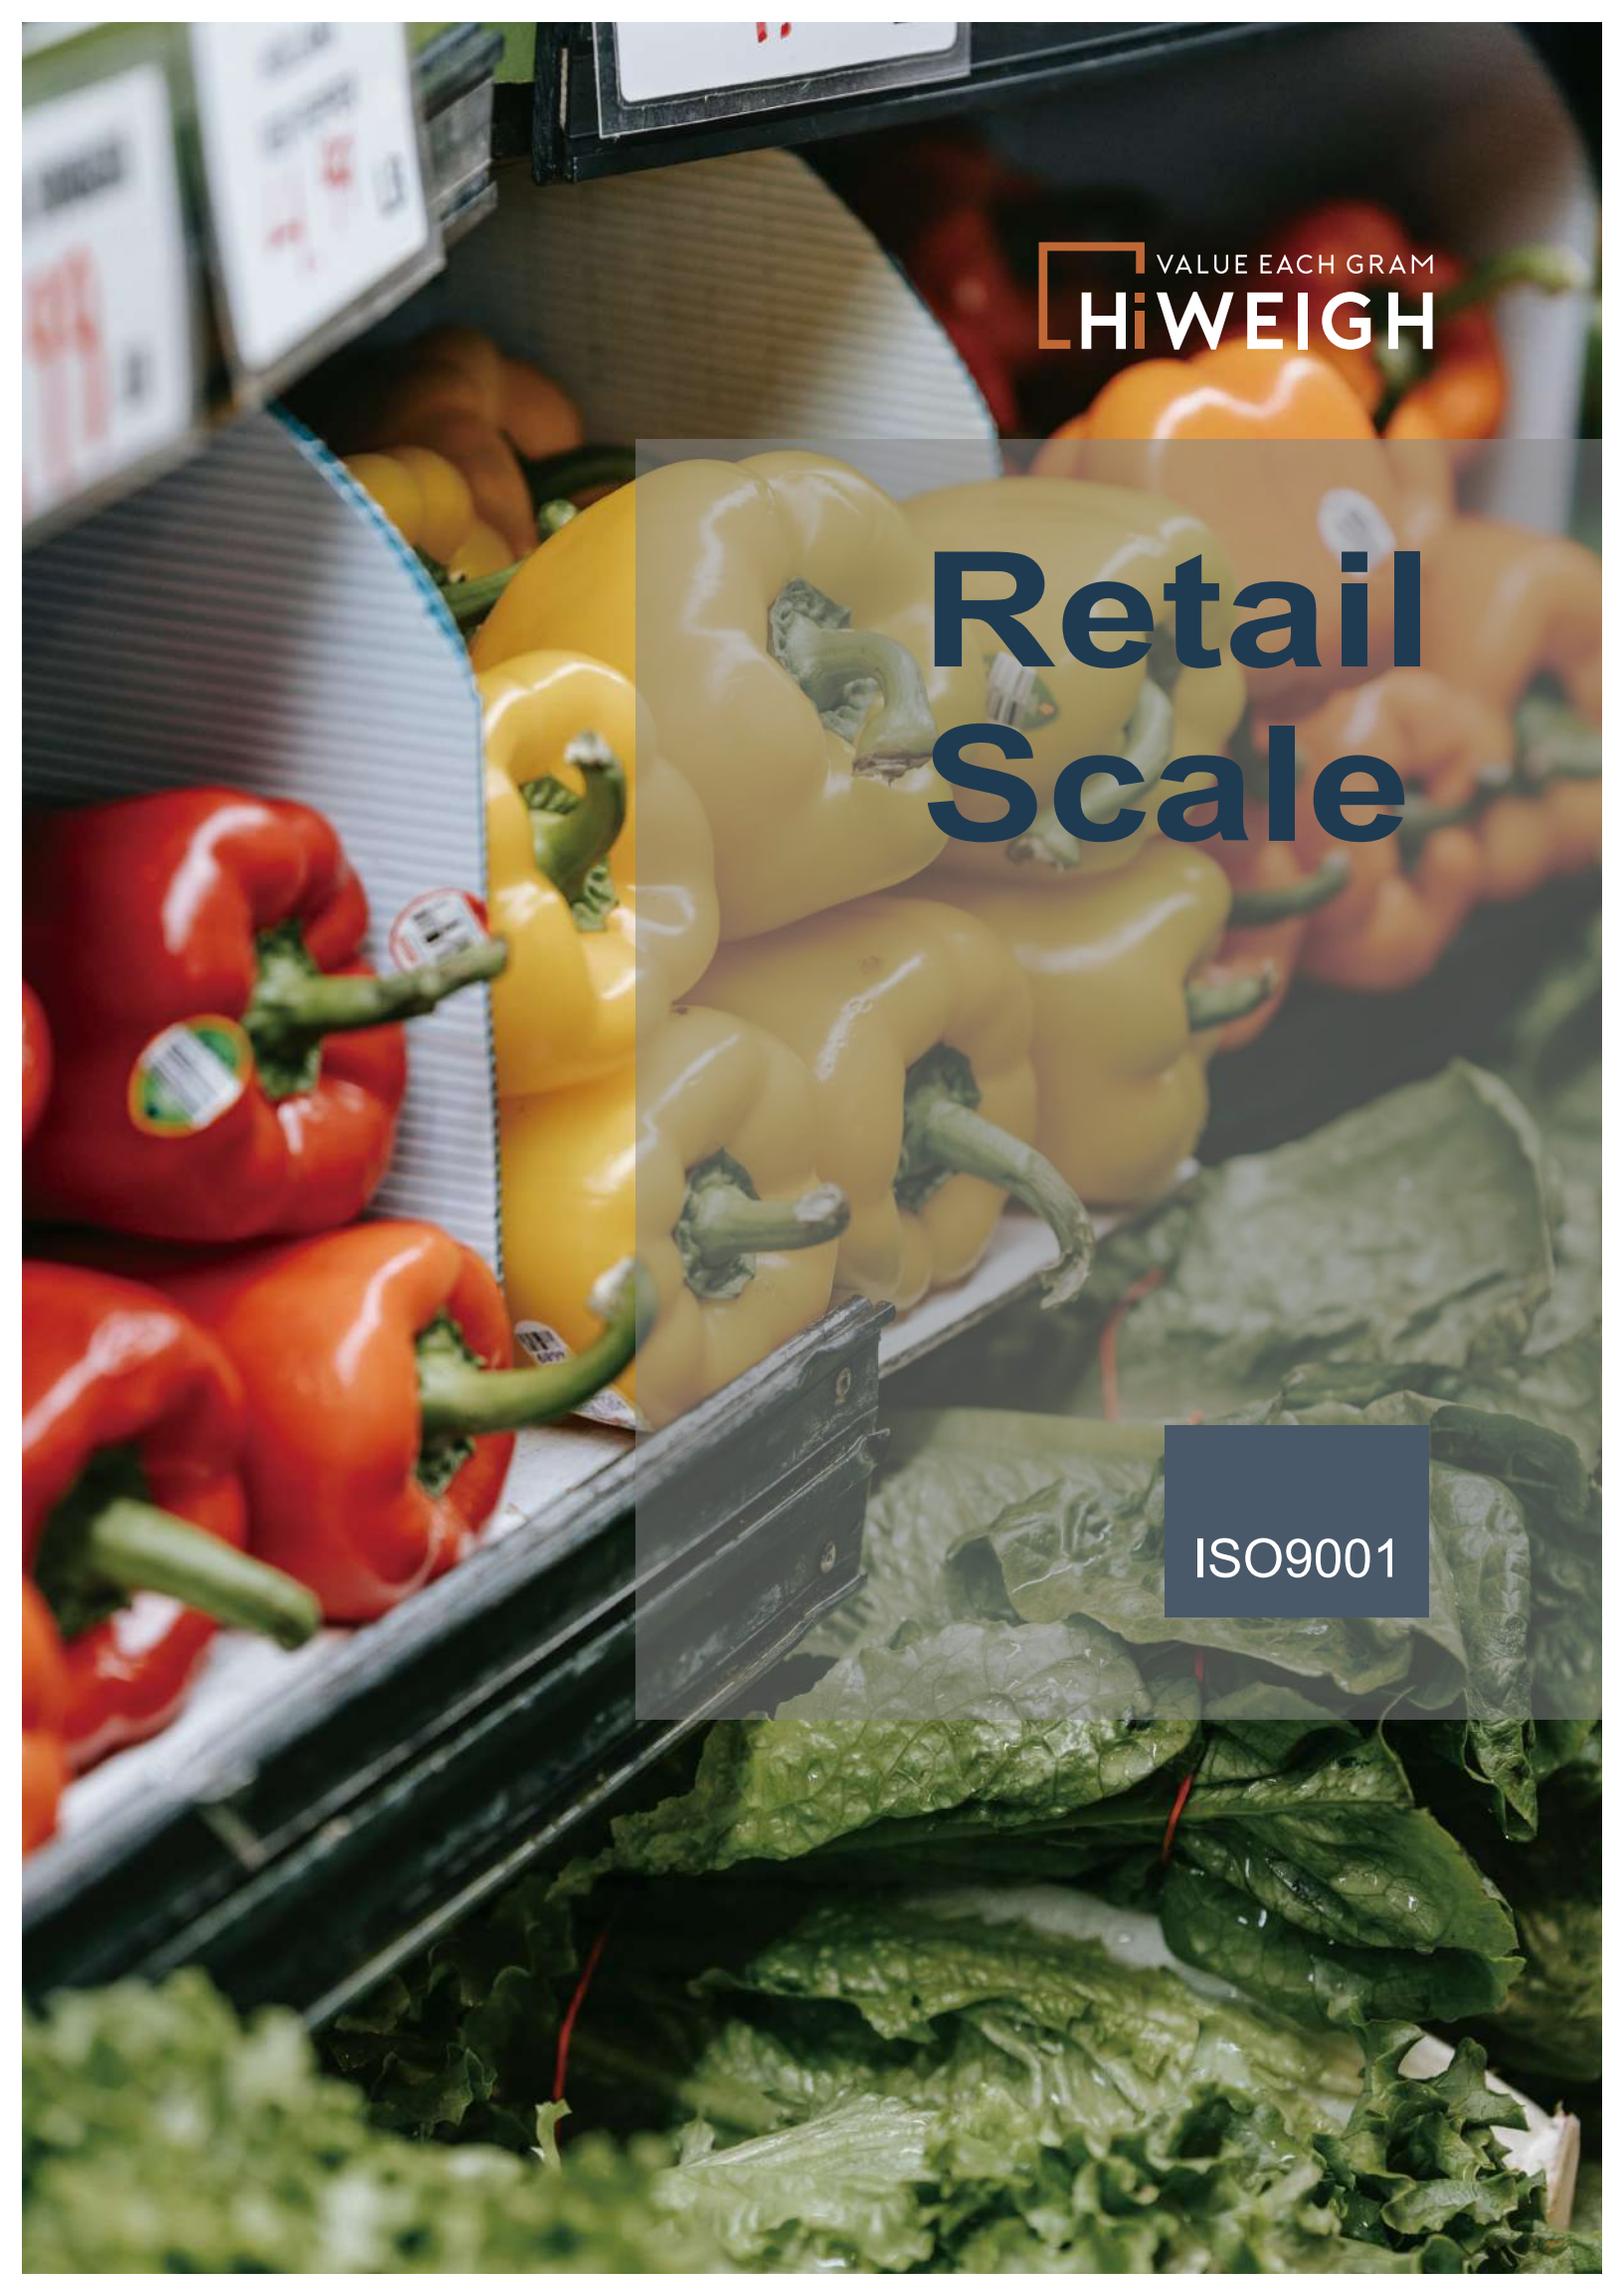

VALUE EACH GRAM  
**HiWEIGH**

# Retail Scale

ISO9001