



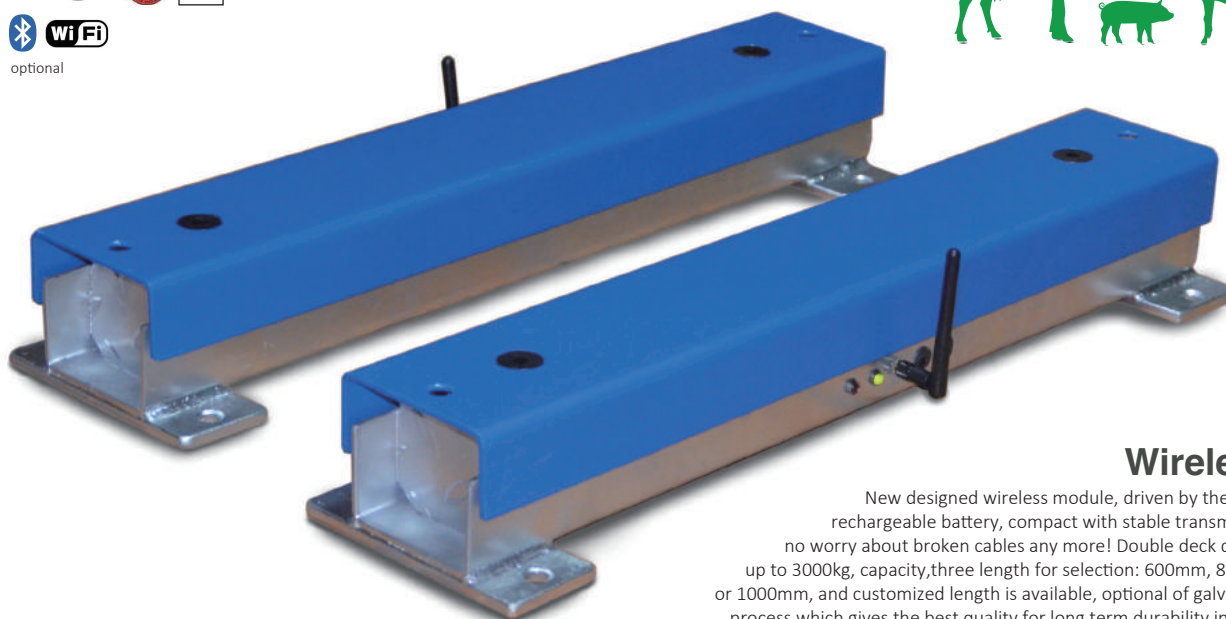

Wireless

New designed wireless module, driven by the Li-ion rechargeable battery, compact with stable transmitting, no worry about broken cables any more! Double deck design, up to 3000kg, capacity, three length for selection: 600mm, 800mm or 1000mm, and customized length is available, optional of galvanized process which gives the best quality for long term durability in harsh environment. Low profile of 90.3mm height only



dimension: mm

Models	a	b	c	d	e	f
ABW600	600	540	442.4	568	90.3	100
ABW800	800	740	642.4	768	90.3	100
ABW1000	1000	940	842.4	968	90.3	100

Power

100-240V 50/60Hz Adaptor
 Rechargeable Battery: 6V2.8Ah
 Estimated Battery Life: 30 hours
 Charge Time: 8 Hours

Display

red LED - 0.8"

Units

Kg/lb

Length

600/800/1000mm
 (customized length available)

Output

RS232
 optional Bluetooth
 optional WiFi

Capacity

500-3000Kg

Operating Temperature

-10°C - 40°C

Load Cell & Approval

M28 - CE
 H8C - OIML/NTEP

Approval

CE

Load Cell Protection

IP67



X3AFM Indicator

Stainless steel bracket, easy for wall mounting, red LED display, with built-in rechargeable battery, animal weighing function, hold, accumulating, kg/lb units, x10 accuracy, counting, zero, tare, printing, etc. Default with RS232 connector, option of Bluetooth or WiFi.



M28 LoadCell

4 units of IP67 alloy steel M28 shear beam load cell; Optional 4units OIML/NTEP approved H8C load cells

Connection

5m shielded cable

Accessories



PT2 Printer



ISA stand



Car charger

*Prices with indicators included										Models
Part No.	100767	100768	100769	100770	100771	100772	100773	100774	100775	
Models	ABW610	ABW620	ABW630	ABW810	ABW820	ABW830	ABW110	ABW120	ABW130	
U.P.(USD)	\$1,120.00	\$1,120.00	\$1,120.00	\$1,180.00	\$1,180.00	\$1,180.00	\$1,240.00	\$1,240.00	\$1,240.00	
Capacity	1000kg	2000kg	3000kg	1000kg	2000kg	3000kg	1000kg	2000kg	3000kg	
Division	0.2kg	0.5kg	1kg	0.2kg	0.5kg	1kg	0.2kg	0.5kg	1kg	
Size		600mm			800mm			1000mm		
Weight		24kg			27kg			33kg		