


a = default of 300mm ramp, optional 500mm
1000mm | 1200mm | 1500mm



Platform Sizes

1000 x 1000mm
1200 x 1200mm
1500 x 1500mm

Capacity

1500kg | 3000kg

Division

0.2kg | 0.5kg | 1.0kg

Load Cell Approval

M28 - CE
H8C - OIML | NTEP

Load Cell Protection

IP67

Operating Temperature

-10 - 40°C

Power

100-240V - 12V adaptor
Battery: 6V2.8Ah
Battery life: 24 hours

Display

X3AC - 1" FSTN LCD
X3AM - 1" LCD

Indicator & Approval

X3AC - CE
X3AM - OIML/EC Type

Unit

Kg | lb

Output


RS232



ISA



X3AC



X3AM



M28 | H8C LoadCell


IP67 protection, with alloy steel feet
Models1 with standard M28 load cells
Models2 with OIML/NTEP approved H8C load cells

X3A Indicator

ABS housing
Stainless steel bracket
Table top or wall-mounting
X3AC - models1 (CE)
X3AM - models2 (CE | OIML)
Rechargeable battery
Programming zero tracking
Kg/lb units
Counting function
Animal weighing
Hold function
Power saving mode
Accumulation
RS232 interface

Low Profile Platform

Smooth plate with guide rail
- optional checked plate
Detachable ramp (default of 300mm)
- optional 500mm ramp
Capacity up to 3000kg
Powder coated finish
Optional wireless connection

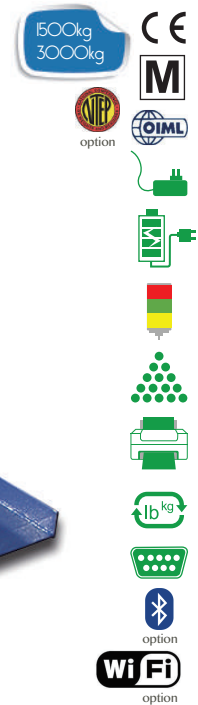

Accessories

ISA | MDS

Models * Prices not include indicators

Part No.	100345	100346	100347	100348	100349	100350
Models1	FDR1015	FDR1030	FDR1215	FDR1230	FDR1515	FDR1530
U.P.(USD)	\$1,220.00	\$1,220.00	\$1,420.00	\$1,420.00	\$1,660.00	\$1,660.00
Part No.	100351	100352	100353	100354	100355	100356
Models2	FDR1015M	FDR1030M	FDR1215M	FDR1230M	FDR1515M	FDR1530M
U.P.(USD)	\$1,360.00	\$1,360.00	\$1,560.00	\$1,560.00	\$1,800.00	\$1,800.00
Capacity	1500kg	3000kg	1500kg	3000kg	1500kg	3000kg
Division	0.2 0.5kg	0.5 1kg	0.2 0.5kg	0.5 1kg	0.2 0.5kg	0.5 1kg
Size	1000 x 1000mm		1200 x 1200mm		1500 x 1500mm	
Weight	130kg		154kg		273kg	