HiWEIGH
VALUE EACH GRAM

SERIES X2

SPECIFICATIONS

Display	Backlit LCD display
Units	kg / g / lb / oz
Approval	OIML & EU Type
Display Resolution	1/3,000-1/30,000 (approved 1/6,000)
A/D Resolution	10,000,000
A/D Rate	60 times/second
Operating Temperature	0 °C - 40 °C

FUNCTIONS

- Hold
- Counting
- Totalization
- Checkweigh
- Animal weighing
- Zero range programmable
- G value (gravity) adjusting

MODELS

Model	Part No.
X2	101027
X2 OIML	101028
X2SS	101029
X2SS OIML	101030

OPTIONAL

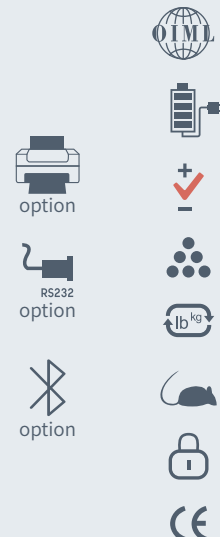| Accessories	Part No.
Bluetooth-(With app)	109005
WiFi	109007
Bluetooth	109010
Relay 3 output	109011
RS232	109012

FEATURES

- OIML and EU Type approval

  Professional for legal trade weighing platforms or weighing system.

- Small but powerful, designed in compact housing, X2 and X2SS meet your different weighing needs.

- Many optional accessories make your scale with more functions.

  such as RS232, Bluetooth etc, which make sure it can work with the customer's printers, ERP system and other iOT solutions.

EXCITATION

Power
100-240V AC
12V DC Adaptor

Analog Input Signal
-10-15mV

Load cell
1-4*350Ω
1-8*700Ω

option
RS232 option
option

+86-512-67317873 | www.hiweigh.com | info@hiweigh.com

X2

IP54

ENCLOSURE

ABS
stainless steel bracket

FEATURES

Plastic pole holder

PACK SIZE

150*430*680mm (10pcs)

WEIGHT

13.5kg (10pcs)

X2SS

IP65

ENCLOSURE

SUS304 stainless steel

FEATURES

Stainless steel pole holder

PACK SIZE

870*330*360mm (10pcs)

WEIGHT

27 kg (10pcs)

175mm

105mm

190mm

120mm